

*** 2421 H SERIES ***

Ordering information:

2421P**H00*
1 2

1.No.of circuits

2.Base color:

0=white 1=black 3=red 7=blue 9=gray





MATERIAL :

* INSULATOR: NYLON6/6 RATED UL94V-0


* CONTACT: BRASS

* PLATING: Tin plated 120μ " min over 30μ " min. nickel overall

RoHS COMPLIANT

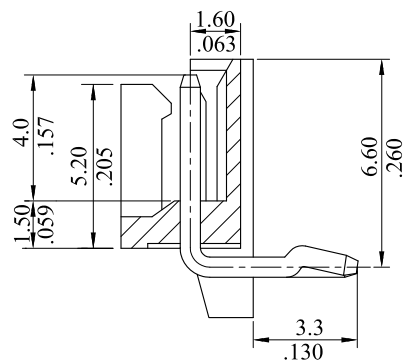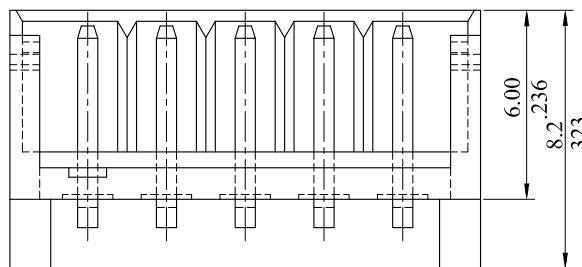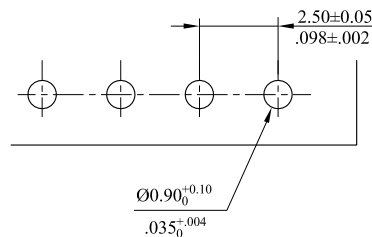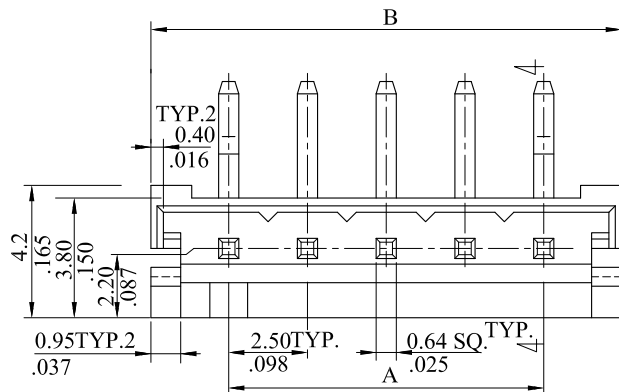

2421P15H00*	15	35.0(1.378)	39.94±0.30(1.572±.012)
2421P14H00*	14	32.5(1.280)	37.44±0.30(1.474±.012)
2421P13H00*	13	30.0(1.181)	34.94±0.30(1.376±.012)
2421P12H00*	12	27.50(1.083)	32.44(1.277)
2421P11H00*	11	25.00(.984)	29.94(1.179)
2421P10H00*	10	22.50(.886)	27.44(1.080)
2421P09H00*	9	20.00(.787)	24.94(.982)
2421P08H00*	8	17.50(.689)	22.44(.883)
2421P07H00*	7	15.00(.591)	19.94(.785)
2421P06H00*	6	12.50(.492)	17.44(.687)
2421P05H00*	5	10.00(.394)	14.94(.588)
2421P04H00*	4	7.500(.295)	12.44(.490)
2421P03H00*	3	5.000(.197)	9.94(.391)
2421P02H00*	2	2.500(.098)	7.44(.293)
PART NO.	CIRCUITS	DIM. A	DIM. B

F	ES110343			 LEOCO CORPORATION	APPROVED: CHARD		PART NO.: 2421P**H00*				
E	ES110315				DATE:		TITLE:				
D	ES101254				CHECKED: SMILE		DRAWING NO.:				
C	ES050827				DATE:		242105S				
B	ES030304				DRAWN: ANGEL						
REV.	ECO. NO.	CHG.	APP.	GENERAL TOLERANCES: (UNLESS SPECIFIED)			UNITS	SCALE	SIZE	SHEET	REV.
							mm	4:1	A4	1/1	F
				1 PLACE	± 0.30		± --				
				2 PLACES	± 0.20		± .012				
				3 PLACES	± 0.10		± .008				
				4 PLACES	± --	± .004					
				ANGULAR ± (1°)							