

*** 2421 V SERIES ***

RoHS COMPLIANT

Ordering information:

2421P ** V * 0 *
1 2 3

Material:

* Insulator : UL 94V-0 NYLON 66
* Contact : Brass





1.No.of circuits

2.Plating:


0= Tin plated 120u" min. over 30u"min. nickel overall
U= Gold flash over 30u"min. nickel overall

3.Base color:

0=white 1=black 3=red 7=blue 9=gray

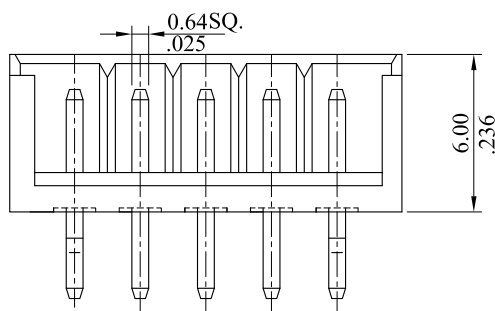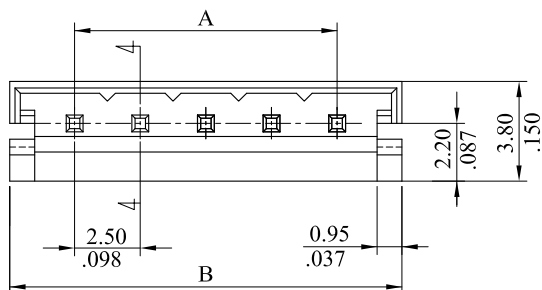

2421P15V*0*	15	35.0(1.378)	39.94±0.30(1.572±.012)
2421P14V*0*	14	32.5(1.280)	37.44±0.30(1.474±.012)
2421P13V*0*	13	30.0(1.181)	34.94±0.30(1.376±.012)
2421P12V*0*	12	27.50(1.083)	32.44(1.277)
2421P11V*0*	11	25.00(.984)	29.94(1.179)
2421P10V*0*	10	22.50(.886)	27.44(1.080)
2421P09V*0*	9	20.00(.787)	24.94(.982)
2421P08V*0*	8	17.50(.689)	22.44(.883)
2421P07V*0*	7	15.00(.591)	19.94(.785)
2421P06V*0*	6	12.50(.492)	17.44(.687)
2421P05V*0*	5	10.000(.394)	14.94(.588)
2421P04V*0*	4	7.500(.295)	12.44(.490)
2421P03V*0*	3	5.000(.197)	9.94(.391)
2421P02V*0*	2	2.500(.098)	7.44(.293)
PART NO.	CIRCUITS	DIM. A	DIM. B

H	ES110343			 LEOCO CORPORATION	APPROVED: CHARD		PART NO.: 2421P**V*0*					
G	ES110315				DATE:		TITLE:					
F	ES101254				CHECKED: SMILE		HEADER					
E	ES070924				DATE:		DRAWING NO.:					
D	ES061018				DRAWN: ANGEL		242106S					
REV.	ECO. NO.	CHG.	APP.		DATE:			UNITS	SCALE	SIZE	SHEET	REV.
					ANGULAR ± (1°)			$\frac{\text{mm}}{\text{inch}}$				