

RoHS COMPLIANT

CUSTOMER DRAWING




REV.	ECO. NO.	DESCRIPTION	DATE
D	ES170808	Upgrade drawing frame Modify the B-2 area dimension	2017.08.04
E	ES210501	E-8 area :Change P/N 2521T*B0H0 to 2512T*B0H0A	2021.05.07
F	ES250714	Update drawing	2025.07.22

Note:


Material:Phosphor Bronze
Plating: Tin plated

Specifications:
Voltage Rating:250V AC/DC
Current Rating:3A,AC,DC
Withstanding Voltage:1000V AC/minute
Insulation Resistance:1000MΩ min
Temperature Range:-25°C~+85°C
Contact Resistance:20mΩ max


Wire Ranges:AWG #22~#28

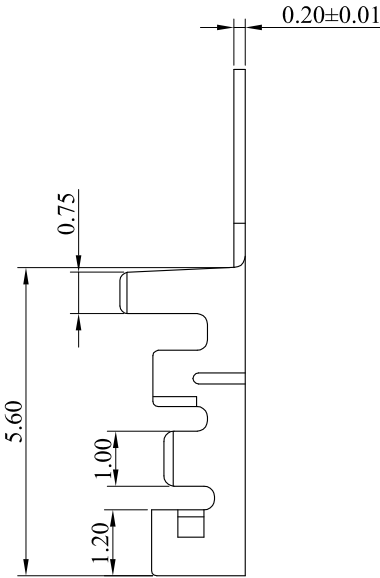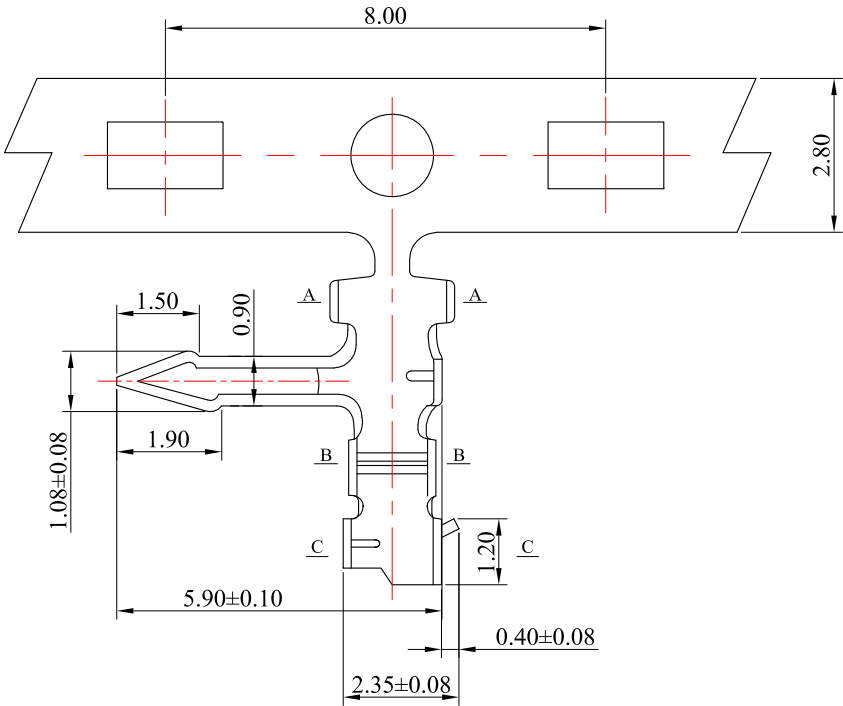


Section A-A



Section B-B



Section C-C

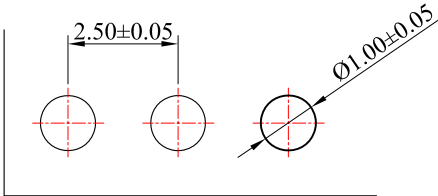

Recommended P.C.B Layout

TOLERANCE UNLESS
OTHERWISE SPECIFIED

mm	mm	inch
1 PLACE	± 0.30	± ---
2 PLACES	± 0.20	± ---
3 PLACES	± 0.10	± ---
4 PLACES	± ---	± ---

ANGULAR ±1°



LEOCO CORPORATION

<http://www.leoco.com.tw>

APPROVED BY:	DATE:
Chard	2025.07.23
CHECKED BY:	DATE:
Angel	2025.07.23
DRAWN BY:	DATE:
Merry	2025.07.22

TITLE:
Terminal
PART NO.:
2512T*B0H0A
DRAWING NO.:
251202S
REV.:
F
SHEET:
1 OF 1

SIZE:

A3

SCALE:

1:1



DRAWING NO.:

251202S

REV.:

F

SHEET:

1 OF 1