



REV.	ECO. NO.	DESCRIPTION	DATE
A	DWG. REL.	APPROVED	2025.04.25

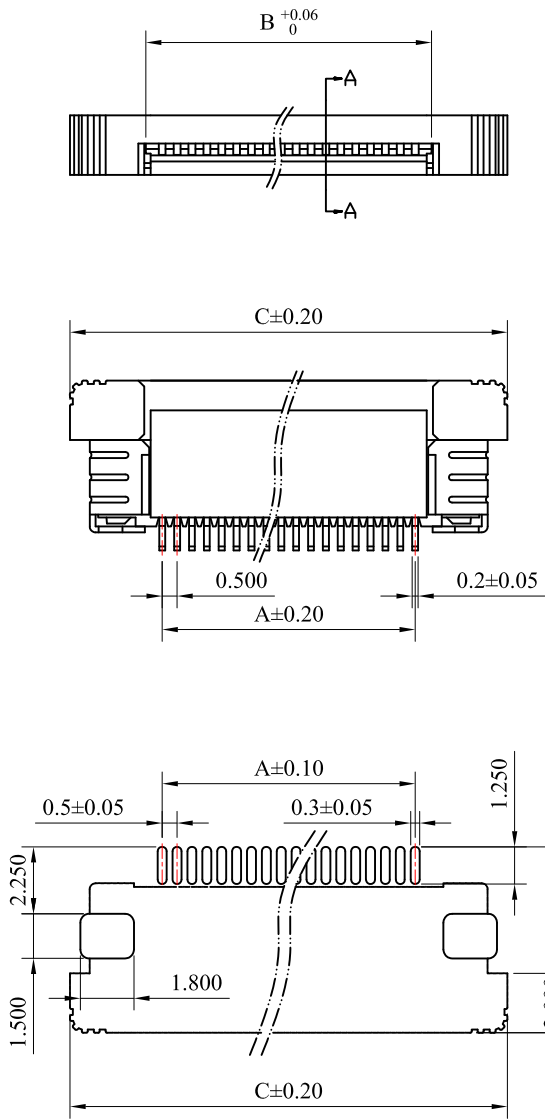

Recommended P.C.B Layout

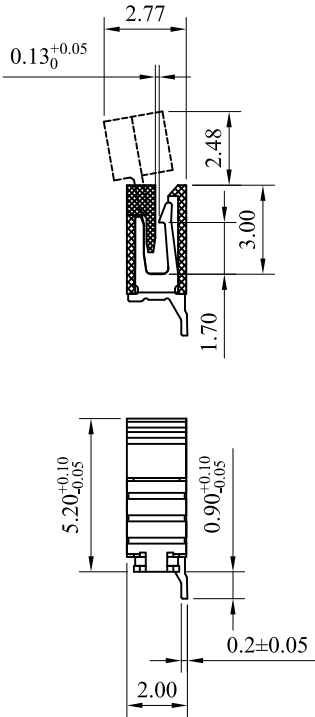

Material:

Insulator: High Temperature thermoplastic, UL94V-0,Natural
Actuator: Thermoplastic, UL94V-0,Brown
Contact: Phosphor Bronze/Tin plated
Latch: Phosphor Bronze/Tin plated

General Part Number:

0503S ** * MB *
1 2 3

1.No.of circuits(40~50)

2.Contact Type

U= Upper contact

D= Down contact

3.Packing:



0=Tube

1=Tape&Reel

A=0.5mm *No.of spaces

B=A+1.0mm

C=A+6.1mm



TOLERANCE UNLESS OTHERWISE SPECIFIED			LEOCO CORPORATION http://www.leoco.com.tw			
mm	mm	inch	APPROVED BY:	DATE:	TITLE:	
1 PLACE	± 0.30	$\pm \text{---}$	Chard	2025.04.25	0.5 Pitch FPC/FFC Connector	
2 PLACES	± 0.20	$\pm \text{---}$	Spring	2025.04.25		
3 PLACES	± 0.10	$\pm \text{---}$	Merry	2025.04.25	PART NO.: 0503S***MB*	
4 PLACES	$\pm \text{---}$	$\pm \text{---}$	SIZE: A3	SCALE: 1:1	DRAWING NO.: 050317S	REV.: A
ANGULAR $\pm 1^\circ$					SHEET: 1 OF 1	