

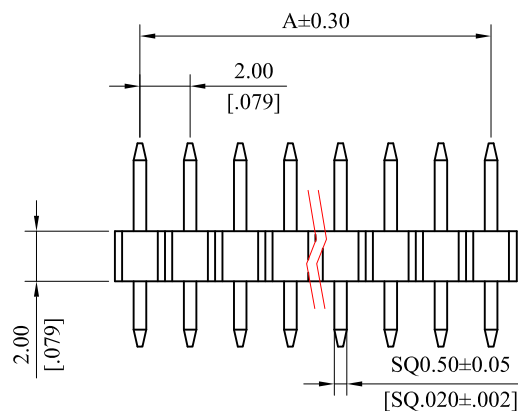


RoHS COMPLIANT

CUSTOMER DRAWING

REV.	ECO. NO.	DESCRIPTION	DATE
A	DWG. REL.	APPROVED	
B	ES060735		
C	ES200817	Material:PBT→High Temperature Thermoplastic	2020.08.31

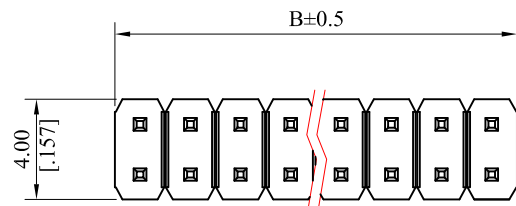

Material:
Insulator: High Temperature Thermoplastic,UL94V-0,Black
Contact: Brass

General part number:

2028P ** V * 00
1 2

1.No.of circuits(2~80P)


2.Plating:

T= Tin plated 120μ" min. over 30μ" min. Nickel underplating overall

U= Gold flash over 30μ" min. Nickel underplating overall

A= 2.00mm*No.of spaces

B= A+2.00mm

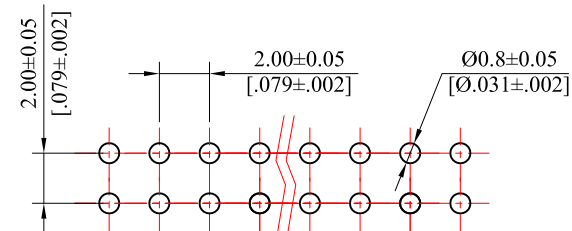

Recommended PCB Layout

TOLERANCE UNLESS OTHERWISE SPECIFIED			 LEOCO CORPORATION http://www.leoco.com.tw		
mm [inch]	mm	inch	APPROVED BY: Chard	DATE: 2020.08.31	TITLE: 2.00mm Pitch Pin Header
1 PLACE	± 0.30	± --	CHECKED BY: Angel	DATE: 2020.08.31	
2 PLACES	± 0.20	± .012	DRAWN BY: Spring	DATE: 2020.08.31	
3 PLACES	± 0.10	± .008	PART NO.: 2028P**V*00		
4 PLACES	± --	± .004	SIZE: A3		DRAWING NO.: 202806S
ANGULAR ±1°			SCALE: 1:1		REV.: C
			SHEET: 1 OF 1		