

RoHS COMPLIANT

CUSTOMER DRAWING

REV.	ECO. NO.	DESCRIPTION	DATE
E	ES160704	CHANGE DIMENSIONS	2016.7.7
F	ES180607	Change: UL94V-2→UL94V-0	2018.6.13
G	ES190504	Change the plating code U to F	2019.5.14

Note:

Material:

Insulator:UL 94V-0 Nylon 6/6;

Contact:Brass

Ordering Information:

2405S**H*00

1 2

1. No.Of Circuits(02~20)




2. Plating:

0=Tin plated 120u" min.over 30u" nickel underplating overall


F=Selective Gold flash on contact area over 30μ" min. Nickel underplating overall,Tin plated on solder tails

A= 2.54(.100")xNo.of spaces

B= A+2.56(.101")

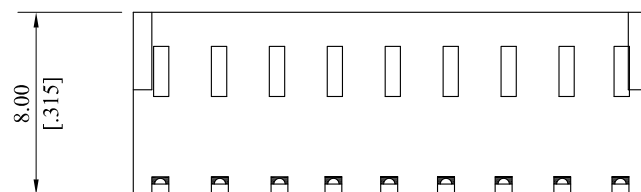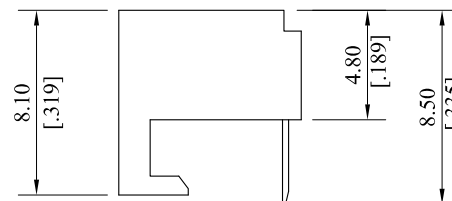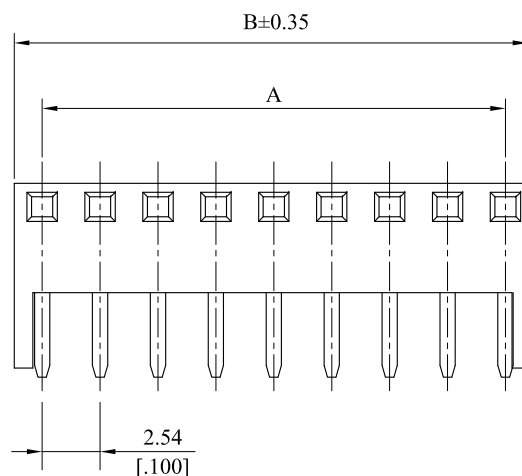

P.C.B EDGE

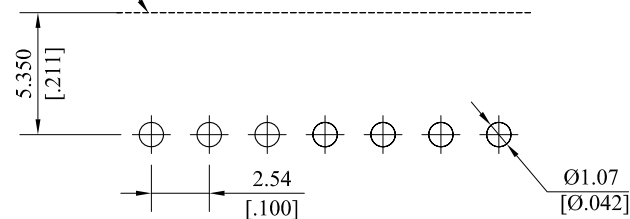P.C.B LAYOUT

TOLERANCE UNLESS OTHERWISE SPECIFIED			 LEOCO CORPORATION <i>http://www.leoco.com.tw</i>				
mm [inch]	mm	inch	APPROVED BY: DATE:		TITLE: 2.54mm PCB Connector		
1 PLACE	± 0.30	± ---	Chard	2019.05.14			
2 PLACES	± 0.20	± .012	CHECKED BY: DATE:		PART NO.: 2405S**H*00		
3 PLACES	± 0.10	± .008	DRAWN BY: DATE:				
4 PLACES	± ---	± .004	Dylan	2019.05.14	DRAWING NO.: 240502S		
ANGULAR ±1°			SIZE: A3	SCALE: 1:1			
							