

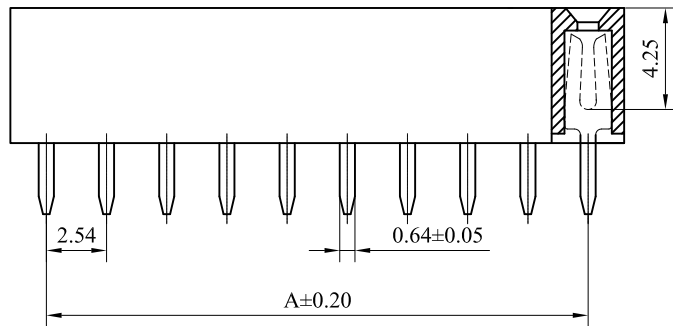


RoHS COMPLIANT

CUSTOMER DRAWING		
REV.	ECO. NO.	DESCRIPTION
A	DWG. REL.	APPROVED
B	ES990104	
C	ES050431	
D	ES070526	
E	ES101254	
F	ES161011	Area 3-C: 0.74→0.64
G	ES22403	Area 6-C: 2443P→2443S Delete inch dimension

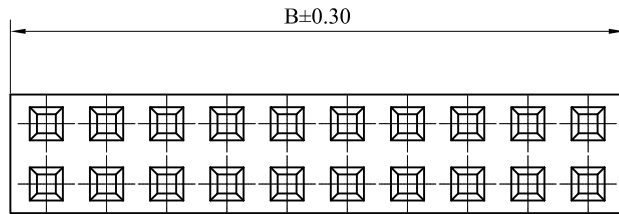

Material:
Insulator: PBT, UL94V-0,Black
Contact: Brass


General Part Number:
2443S ** V * 00
1 2

1.No.of circuits(02~80)

2.Plating

T=Tin plated 120u"min.over 30u" min. Nickel underplating overall
U=Gold flash over 30u" min. Nickel underplating overall
W=15u"min.gold over 30u"min.nickel overall
Z=30u"min.gold over 30u"min.nickel overall

A=2.54mm *No.of spaces
B=A+2.94mm

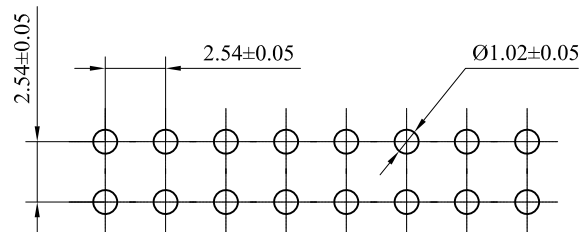

RECOMMENDED HOLE PATTERN

TOLERANCE UNLESS OTHERWISE SPECIFIED			 LEOCO CORPORATION <i>http://www.leoco.com.tw</i>				
mm	mm	inch	APPROVED BY: DATE:		TITLE: 2.54 Pitch Socket		
1 PLACE	± 0.30	± — —	Chard	2022.04.25			
2 PLACES	± 0.20	± — —	CHECKED BY: DATE:		PART NO.: 2443S**V*00		
3 PLACES	± 0.10	± — —	Sping	2022.04.25			
4 PLACES	± — —	± — —	DRAWN BY: DATE:		DRAWING NO.: REV.: SHEET:		
ANGULAR ±1°			Janey	2022.04.25			
			SIZE: A3	SCALE: 1:1			