

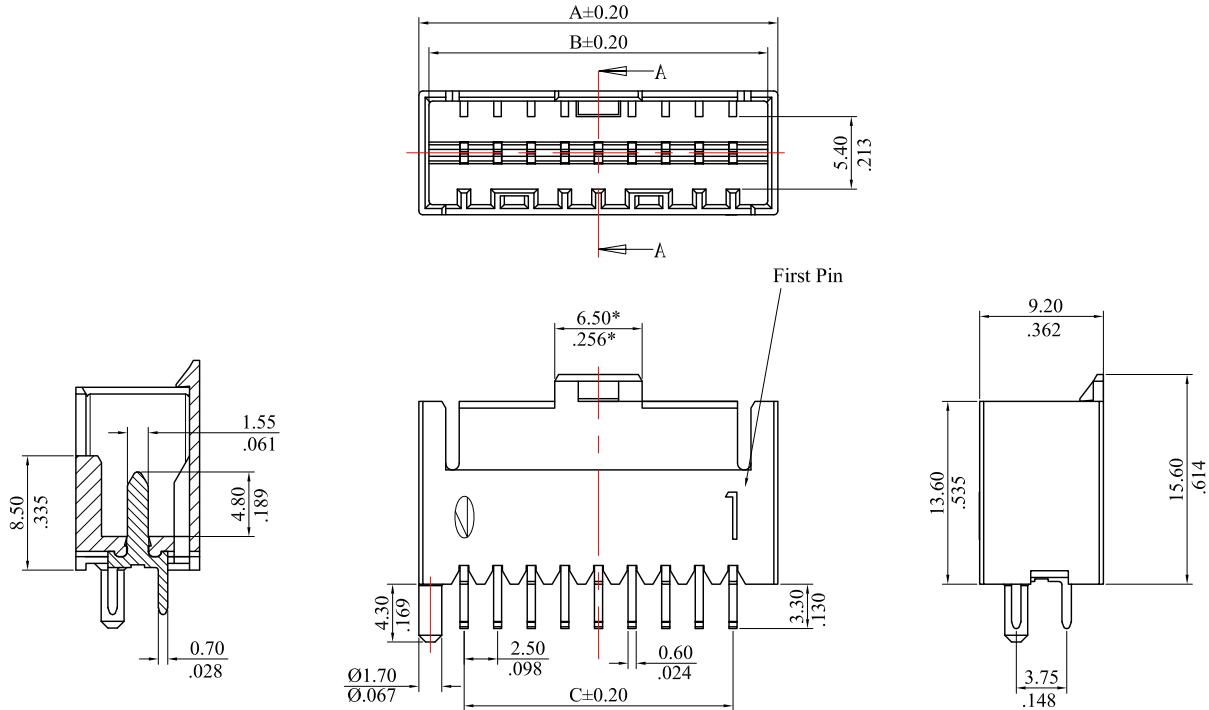




REV.	ECO. NO.	DISCRIPTION	DATE	DRAW BY
H	ES250922	Add packaging instructions	2025.11.12	Merry



SECTION A-A



2514P**D0**



2514P**U1**

Notes:
1.Insulator: PA66+G.F., UL94 V-0, Natural
2.Terminal: Brass,Tin plated 120μ"min. over Ni 30μ"min. overall or silver plated
3.Specification:
Voltage Rating: 32V
Current Rating: 4A Max.
Temperature Rating: -40°C~+110°C
4.UL&VDE Certification:
UL Certification No. E82349,applicable to circuits 2 to 10;
VDE Certification No. 40054227, applicable to circuits 2 to 10.

Ordering Information:


2514P ** D 0 **
1 2 3 4

- No. of circuits
- U:Positioning post is on the top
S:Positioning post is on the top, terminal is silver plated
D:Positioning post is on the bottom
- 0:Normal PCB layout(Pitch 2.5mm)
1:Reverse PCB layout(Pitch 2.5mm)
- Refer to pages 3~4 of drawing

A=C+6.7
B=C+5.2
C=2.50*(No. of circuits-1)

TOLERANCE UNLESS OTHERWISE SPECIFIED			LEOCO CORPORATION			
mm			http://www.leoco.com			
[inch]	mm	inch	APPROVED BY:	DATE:	TITLE:	
1 PLACE	± 0.30	± .012	Chard	2025.12.15		
2 PLACES	± 0.20	± .008	CHECKED BY:	DATE:	Rast 2.5 Male Header	
3 PLACES	± 0.10	± .004	Jack	2025.12.12		
4 PLACES	± --	± --	DRAWN BY:	DATE:	PART NO.: 2514P*****	
ANGULAR ±1°			Merry	2025.11.12		
SIZE:	A3	SCALE:	2:1		DRAWING NO.: 251405S	REV.: H
					SHEET: 1 of 6	

REV.	ECO. NO.	DISCRIPTION	DATE	DRAW BY
H	ES250922	Add packaging instructions	2025.11.12	Merry

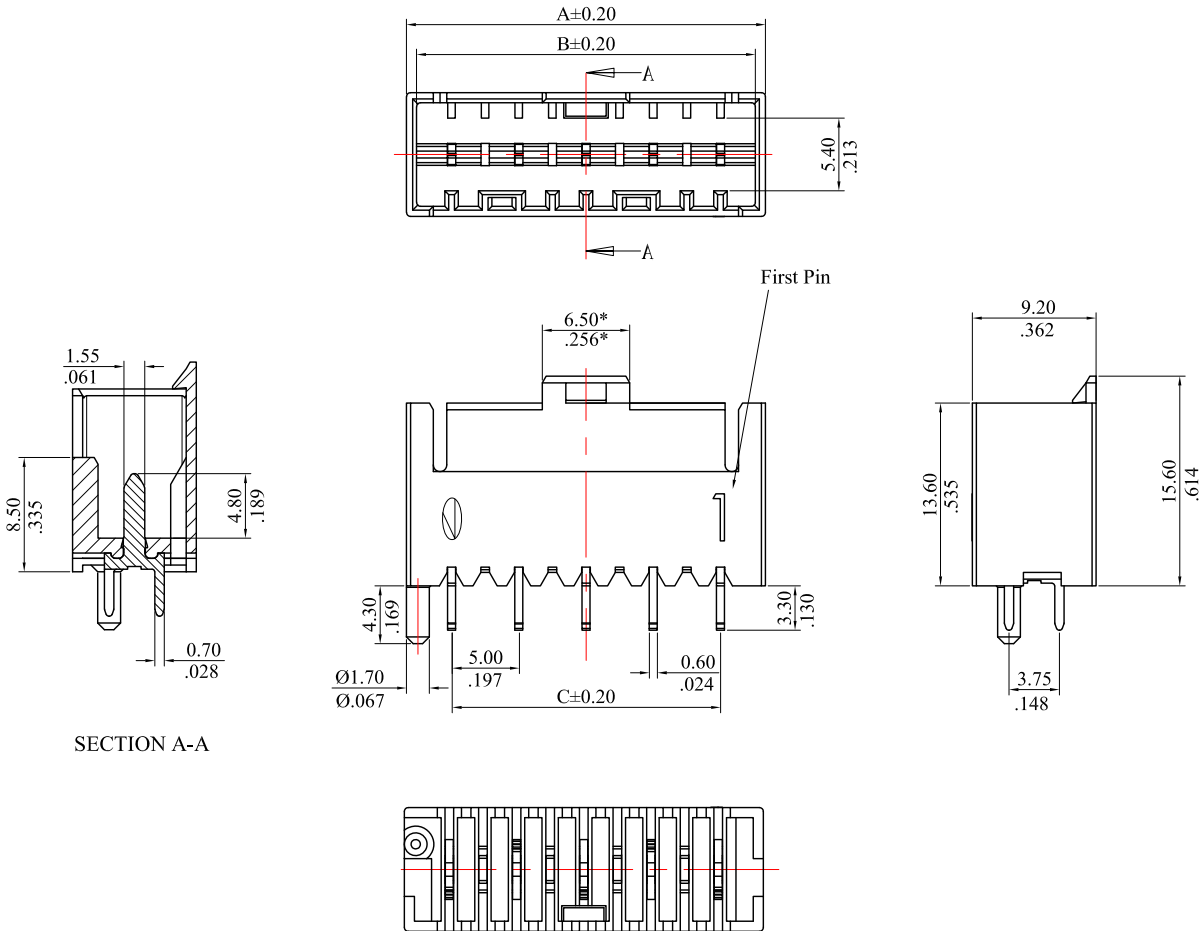


- Notes:
- 1.Insulator:PA66+G.F., UL94 V-0, Natural
 - 2.Terminal:Brass,Tin plated 120μ"min. over Ni 30μ"min. overall or silver plated
 - 3.Specification:
Voltage Rating: 250V
Current Rating: 4A Max.
Temperature Rating: -40°C~+110°C
 - 4.*For 3P is 5.70mm, 2P is 3.20mm
 - 5.UL&VDE Certification:
UL Certification No.E82349,applicable to circuits 2 to 10
VDE Certification No.40054227,applicable to circuits 2 to 10

Ordering Information:

2514P $\frac{**}{1}$ $\frac{D}{2}$ $\frac{P}{3}$ $\frac{P}{4}$ $\frac{**}{4}$

1.No. of circuits
2.U:Positioning post is on the top
S:Positioning post is on the top, terminal is silver plated
D:Positioning post is on the bottom
3.P:Normal PCB layout(Pitch 5.0mm)
Q:Reverse PCB layout(Pitch 5.0mm)
4.Refer to pages 3~4 of drawing

A=C+6.7
B=C+5.2
C=2.50*(No. of circuits-1)

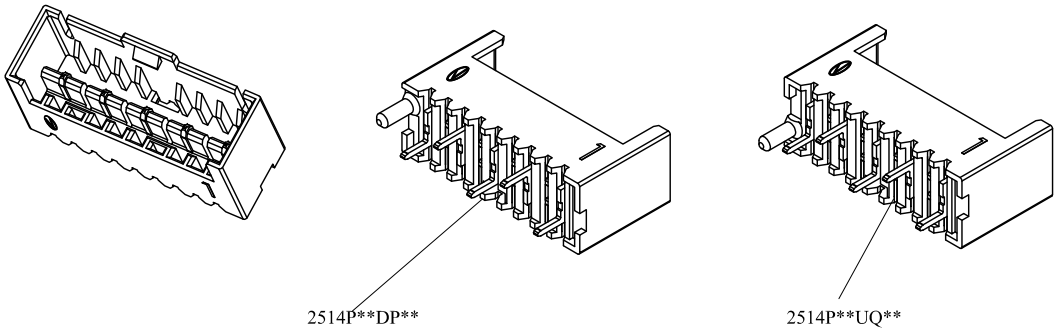

TOLERANCE UNLESS OTHERWISE SPECIFIED			LEOCO CORPORATION			
mm	mm	inch	http://www.leoco.com			
[inch]	mm	inch	APPROVED BY:	DATE:	TITLE:	
1 PLACE	± 0.30	± .012	Chard	2025.12.15	Rast 2.5 Male Header	
2 PLACES	± 0.20	± .008	CHECKED BY:	DATE:		
3 PLACES	± 0.10	± .004	Jack	2025.12.12	PART NO.: 2514P*****	
4 PLACES	± --	± --	Merry	2025.11.12		
ANGULAR ±1°			SIZE: A3	SCALE: 2:1	DRAWING NO.: 251405S	REV.: H
					SHEET: 2 of 6	

* See from top side

TYPE	00	0A	0B
KEY/LOCK			
2-way			

TYPE	00	0A	0B	0C	0D	0E	0F	03	06
KEY/LOCK									
3-way									

08	33	36	37	38

TYPE	0A	0B	0C	0D	0E
KEY/LOCK					
4-way					


TYPE	0A	0B	0C	31	33	41
KEY/LOCK						
5-way						

TYPE	0A	0B
KEY/LOCK		
6-way		


TYPE	0A	0B	0G	60
KEY/LOCK				
7-way				

71	72

TYPE	0A	0B
KEY/LOCK		
8-way		




Empty Key



Empty Key

First Pin

TOLERANCE UNLESS OTHERWISE SPECIFIED			LECO CORPORATION			
mm			http://www.leoco.com			
mm [inch]	mm	inch	APPROVED BY: Chard	DATE: 2025.12.15	Rast 2.5 Male Header	
1 PLACE	± 0.30	± .012	CHECKED BY: Jack	DATE: 2025.12.12		
3 PLACES	± 0.10	± .004	DRAWN BY: Merry	DATE: 2025.11.12	PART NO.: 2514P*****	
4 PLACES	± --	± --	SIZE: A3	SCALE: 2:1		DRAWING NO.: 251405S
ANGULAR ±1°					REV.: H	SHEET: 3 of 6

TYPE	0A	0B	0C
KEY/LOCK 9-way			
			

TYPE	0A	0B	0C
KEY/LOCK 10-way			



TYPE	0A	41
KEY/LOCK 11-way		

TYPE	0A											
KEY/LOCK 12-way												
	12	11	10	9	8	7	6	5	4	3	2	1

TYPE	0A
KEY/LOCK 13-way	

TYPE	0A													
KEY/LOCK 14-way														



TYPE	0A	09
KEY/LOCK 15-way		

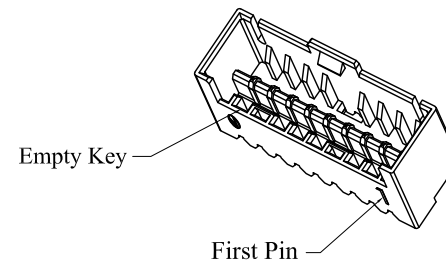

TOLERANCE UNLESS OTHERWISE SPECIFIED			 LEOCO CORPORATION http://www.leoco.com		
mm			APPROVED BY:	DATE:	TITLE: Rast 2.5 Male Header
[inch]	mm	inch	Chard	2025.12.15	
1 PLACE	± 0.30	± .012	CHECKED BY:	DATE:	
2 PLACES	± 0.20	± .008	Jack	2025.12.12	
3 PLACES	± 0.10	± .004	DRAWN BY:	DATE:	PART NO.: 2514P*****
4 PLACES	± —	± —	Merry	2025.11.12	
ANGULAR ±1°			SIZE: A3	SCALE: 2:1	
			DRAWING NO.: 251405S	REV.: H	SHEET: 4 of 6

			1			2			3		
			A			B			C		
			B			C			D		
			C			D			E		
			D			E			H		
			E			H			REV.		
			H			ECO. NO.			DISCRIPTION		
			ES250922			Add packaging instructions			ANGULAR ±1°		
			APPROVED:			PART NO.:			TITLE:		
			Chard			2514P*****			Rast2.5 Male Header		
			DATE:			2025.12.15			DRAWING NO.:		
			CHECKED:			Jack			251405S		
			DATE:			2025.12.12			SCALE		
			DRAWN:			Merry			SIZE		
			DATE:			2025.11.12			SHEET		
			UNITS			2:1			A4		
			mm			5/6			H		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm			2:1			A4		
			mm								

Packaging:Tray with Cover

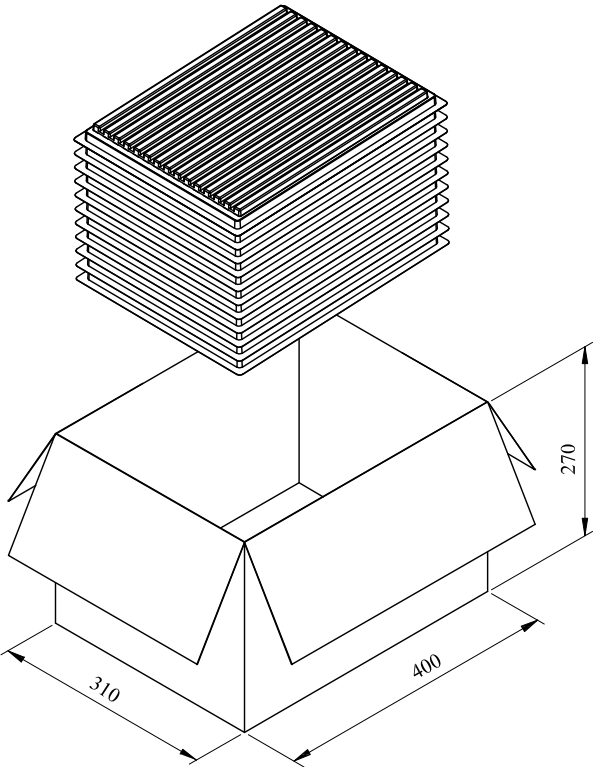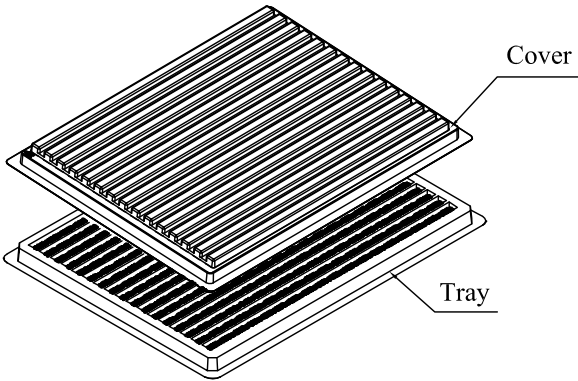

Part No.	Packing Quantities		
	Pcs/Tray	Tray/Carton	Pcs/Carton
2514P02****	525	11	5775
2514P03****	405	11	4455
2514P04****	330	11	3630
2514P05****	285	11	3135
2514P06****	240	11	2640
2514P07****	210	11	2310
2514P08****	195	11	2145
2514P09****	180	11	1980
2514P10****	165	11	1815
2514P11****	150	11	1650
2514P12****	135	11	1485
2514P13****	120	11	1320
2514P14****	120	11	1320
2514P15****	105	11	1155

TOLERANCE UNLESS OTHERWISE SPECIFIED

mm	mm	inch
[inch]		
1 PLACE	± 0.30	± .012
2 PLACES	± 0.20	± .008
3 PLACES	± 0.10	± .004
4 PLACES	± --	± --

ANGULAR ±1°

LECO CORPORATION

<http://www.leoco.com>

APPROVED BY:	DATE:	TITLE:
Chard	2025.12.15	
CHECKED BY:	DATE:	Rast 2.5 Male Header
Jack	2025.12.12	
DRAWN BY:	DATE:	PART NO.: 2514P*****
Merry	2025.11.12	
SIZE:	SCALE:	
A3	2:1	
DRAWING NO.: 251405S	REV.: H	SHEET: 6 of 6