


RoHS COMPLIANT



CUSTOMER DRAWING

REV.	ECO. NO.	DESCRIPTION	DATE
F	ES071009		
G	ES090527		
H	ES101242		
I	ES160911	DELETE DIMENSION	2016.9.29
J	ES180211	E7: 395105S →254005S	2018.02.06

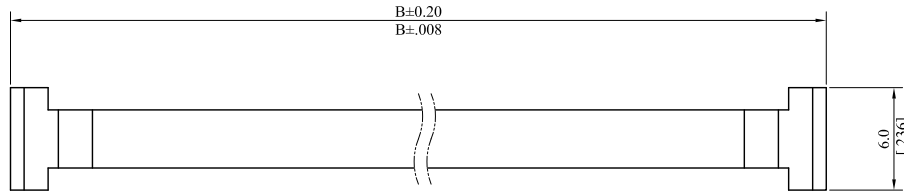

Note:
Material: PBT+G/F,UL 94V-0

$A = 2.54(.100") \times \text{pin}/2 + 1.20(.047")$
 $B = 2.54(.100") \times \text{pin}/2 + 4.70(.185")$

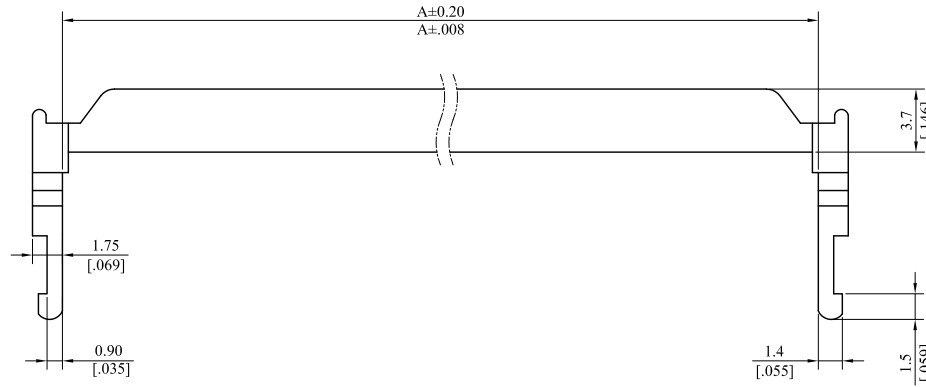

TOLERANCE UNLESS
OTHERWISE SPECIFIED

mm [inch]	mm	inch
1 PLACE	± 0.30	$\pm \text{---}$
2 PLACES	± 0.20	$\pm .012$
3 PLACES	± 0.10	$\pm .008$
4 PLACES	$\pm \text{---}$	$\pm .004$

ANGULAR $\pm 1^\circ$



LEOCO CORPORATION

<http://www.leoco.com.tw>

APPROVED BY: Chard
DATE: 2018.02.06

CHECKED BY: Angel
DATE: 2018.02.06

DRAWN BY: Dylan
DATE: 2018.02.06

SIZE: A3
SCALE: 1:1



TITLE:
I.D.C. Socket Strain Relief

PART NO.:
2540S**SR01

DRAWING NO.: 254005S
REV.: J
SHEET: 1 OF 1