

*** 2555 Series ***

RoHS COMPLIANT

Ordering Information :

2555S *** 000
1 2

1. No. of circuits.(8 through 80 circuits)

Material:

2. Plating :

* Insulator: PBT, UL94V-0



T=Tin plated 120μ " min over 30μ " min. nickel overall

* Contact : Phosphor bronze



U=Gold flash over 30μ "min. nickel overall

W= 15μ "min. gold over 30μ " min. nickel overall


Z= 30μ "min. gold over 30μ " min. nickel overall

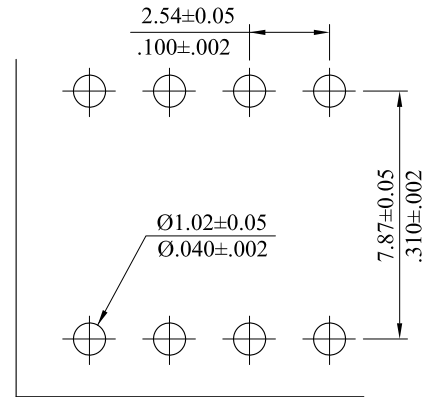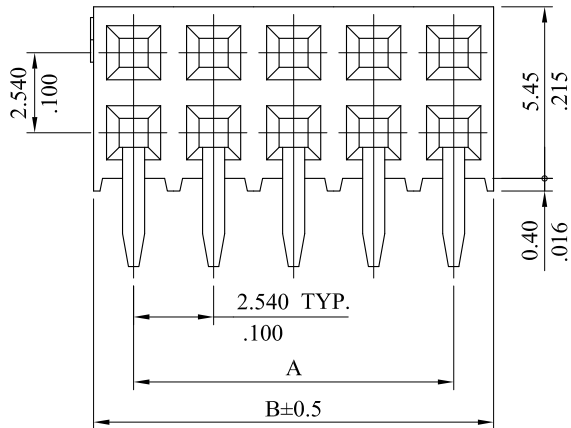

Recommended Hole Pattern

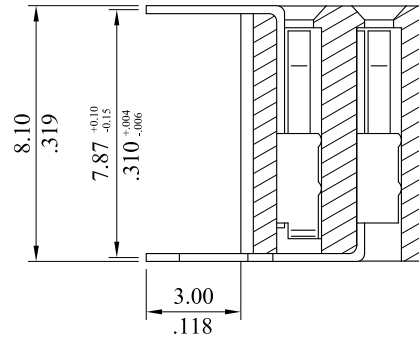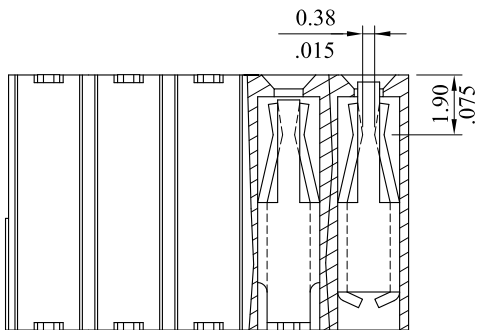

0.70×0.25
.027×.010

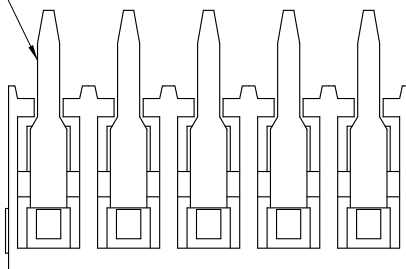

* A = 2.54mm(.100") × No. of spaces

* B = A + 2.54mm(.100")



LEOCO CORPORATION

GENERAL TOLERANCES:
(UNLESS SPECIFIED)

	mm	inch
1 PLACE	± 0.30	± --
2 PLACES	± 0.20	± .012
3 PLACES	± 0.10	± .008
4 PLACES	± --	± .004

ANGULAR ± (1°)

APPROVED:


DATE:

CHECKED:

DATE:

DRAWN:

DATE:



UNITS
mm
inch

PART NO.:

2555S***000

TITLE:

2.54mm(.100") Pitch
Dual Row PCB Connector

DRAWING NO.:

255501S

SCALE

SIZE

SHEET

REV.

4:1

A4

1/1

C

C ES101242

B ES081001

A DWG REL

REV. ECO. NO. CHG. APP.