


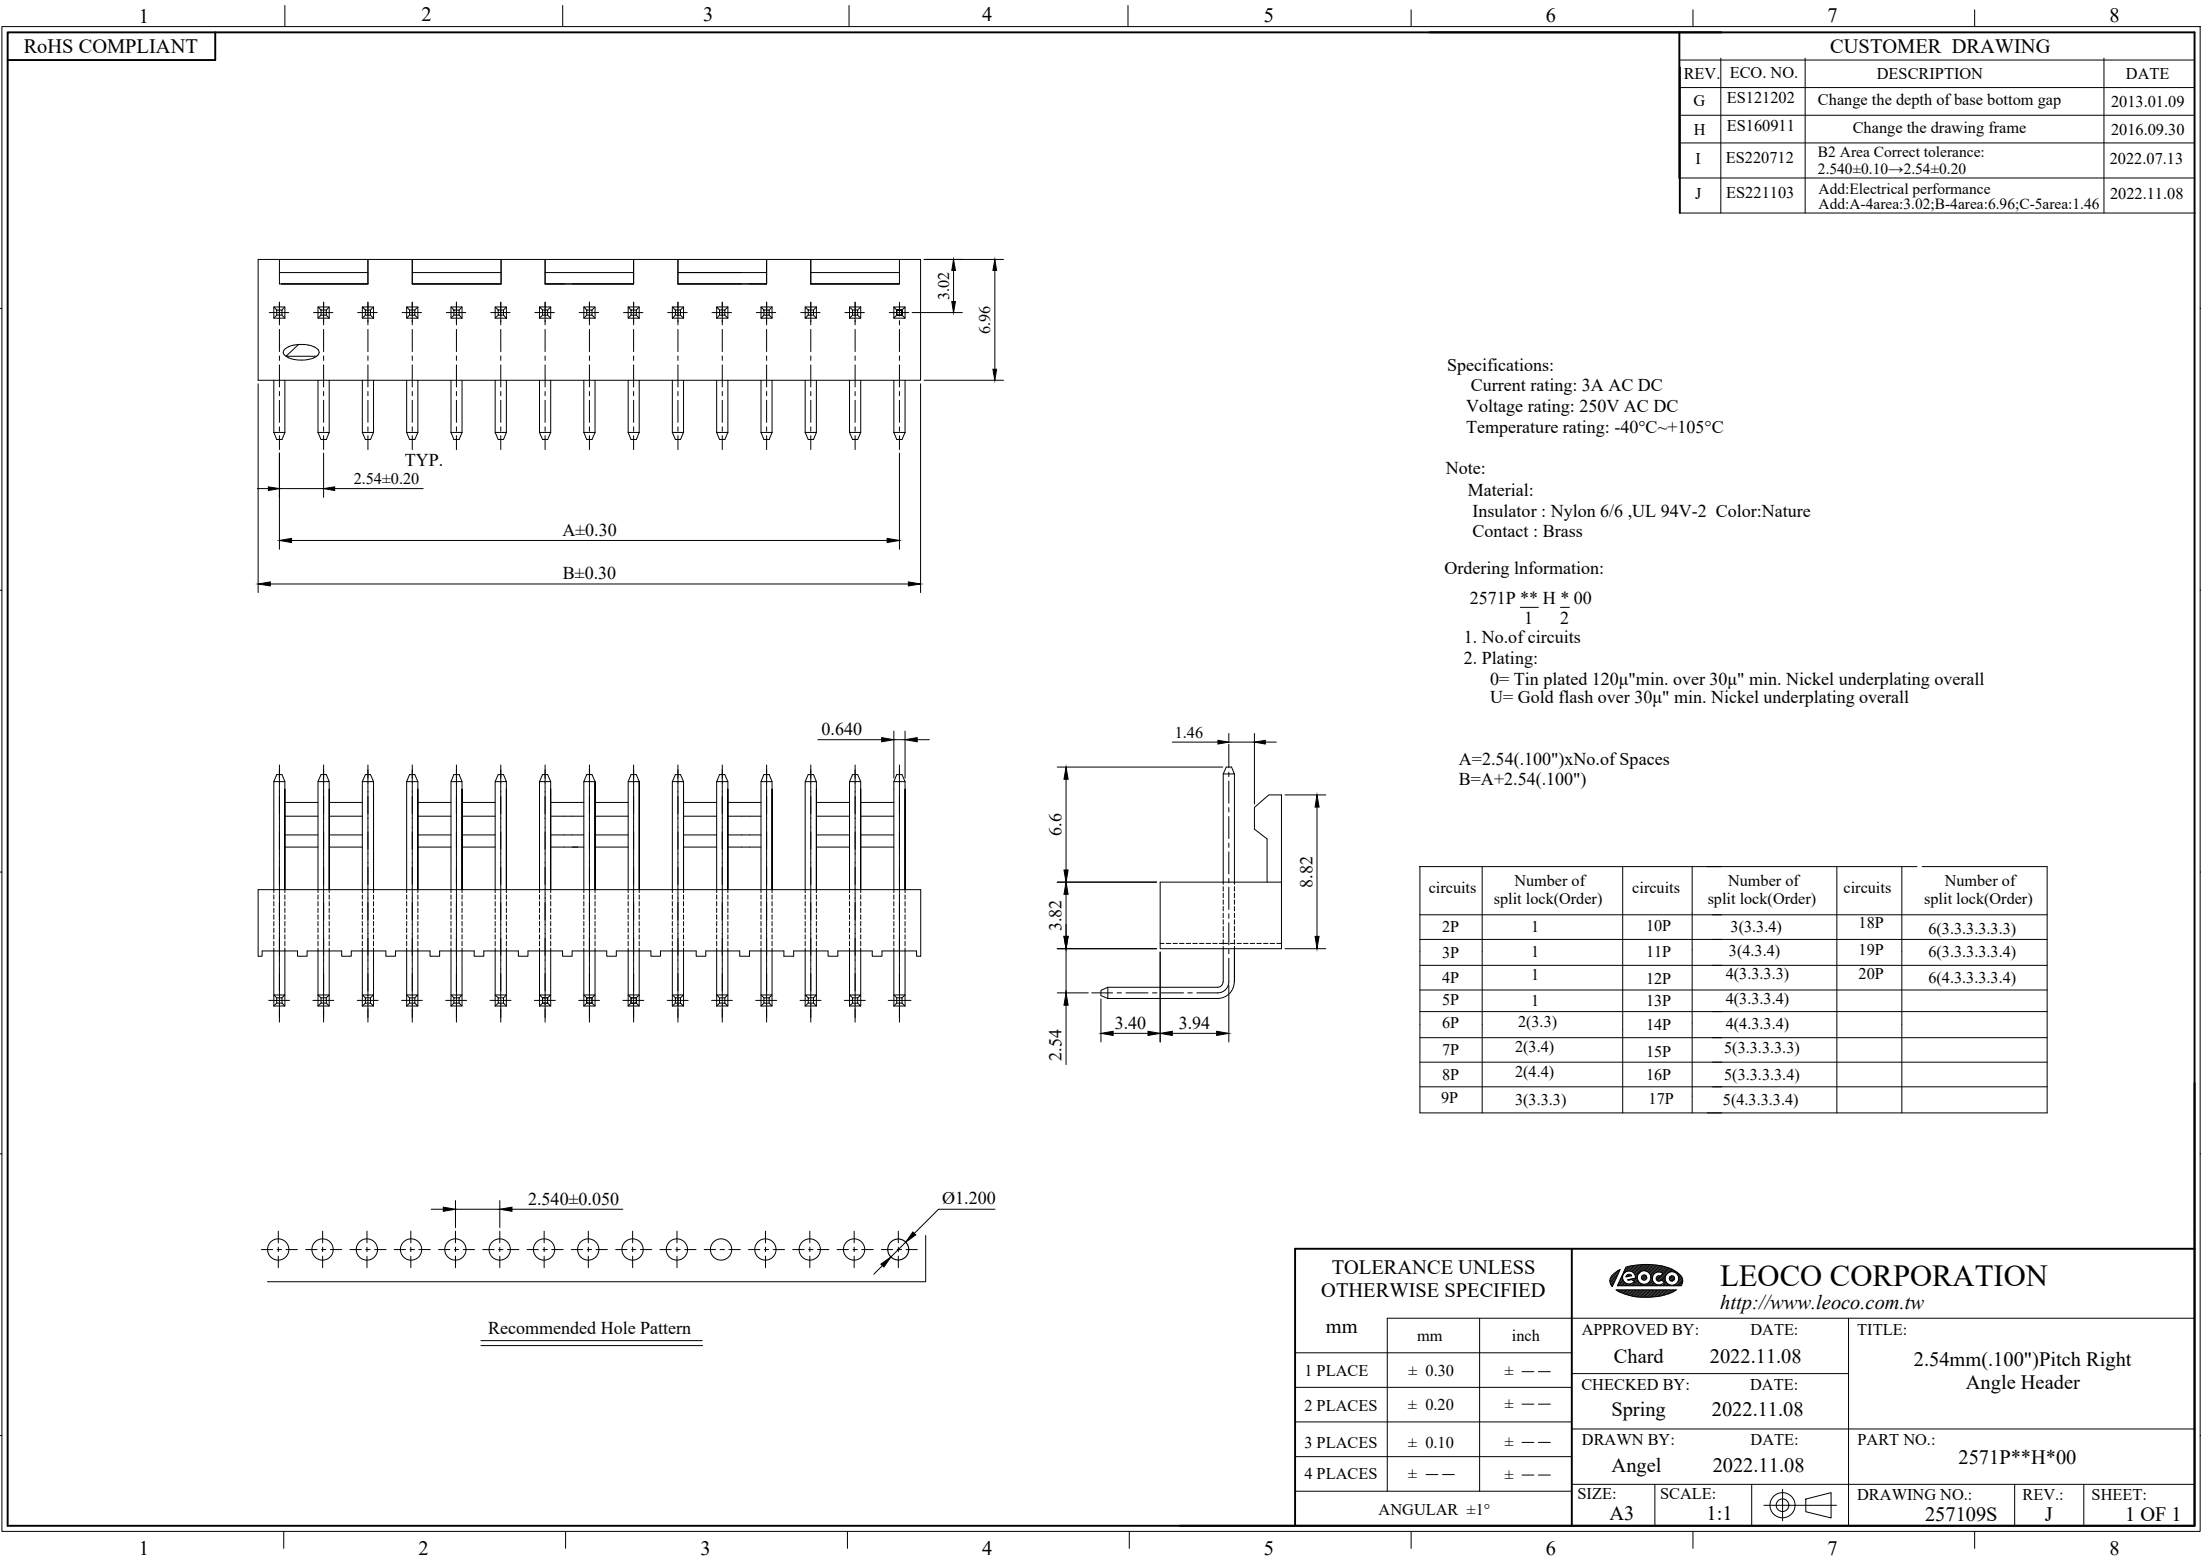

RoHS COMPLIANT

CUSTOMER DRAWING			
REV.	ECO. NO.	DESCRIPTION	DATE
G	ES121202	Change the depth of base bottom gap	2013.01.09
H	ES160911	Change the drawing frame	2016.09.30
I	ES220712	B2 Area Correct tolerance: 2.540±0.10→2.54±0.20	2022.07.13
J	ES221103	Add:Electrical performance Add:A-4area:3.02;B-4area:6.96;C-5area:1.46	2022.11.08

Specifications:
Current rating: 3A AC DC
Voltage rating: 250V AC DC
Temperature rating: -40°C~+105°C

Note:
Material:
Insulator : Nylon 6/6 ,UL 94V-2 Color:Nature
Contact : Brass

Ordering Information:
2571P ** H * 00
1 2
1. No.of circuits
2. Plating:
0= Tin plated 120μ"min. over 30μ" min. Nickel underplating overall
U= Gold flash over 30μ" min. Nickel underplating overall

A=2.54(.100")xNo.of Spaces
B=A+2.54(.100")

circuits	Number of split lock(Order)	circuits	Number of split lock(Order)	circuits	Number of split lock(Order)
2P	1	10P	3(3.3.4)	18P	6(3.3.3.3.3)
3P	1	11P	3(4.3.4)	19P	6(3.3.3.3.4)
4P	1	12P	4(3.3.3.3)	20P	6(4.3.3.3.4)
5P	1	13P	4(3.3.3.4)		
6P	2(3.3)	14P	4(4.3.4)		
7P	2(3.4)	15P	5(3.3.3.3.3)		
8P	2(4.4)	16P	5(3.3.3.3.4)		
9P	3(3.3.3)	17P	5(4.3.3.3.4)		

TOLERANCE UNLESS OTHERWISE SPECIFIED			LEOCO CORPORATION http://www.leoco.com.tw			
mm	mm	inch	APPROVED BY:	DATE:	TITLE: 2.54mm(.100")Pitch Right Angle Header	
1 PLACE	± 0.30	± ---	Chard	2022.11.08		
2 PLACES	± 0.20	± ---	Spring	2022.11.08	PART NO.: 2571P**H*00	
3 PLACES	± 0.10	± ---	Angel	2022.11.08		
4 PLACES	± ---	± ---	SIZE:	SCALE:	DRAWING NO.: 257109S	
ANGULAR ±1°			A3	1:1		
					REV.:	SHEET:
					J	1 OF 1