

Material: Iserlater: PBT UL94V-0 Color: Black Metal: Pre-tinned Phosphoer bronze

Make kinks on the first and end terminal.

UL approved, UL no. is E82349. RoHS compliant.

When the locking mechanism is in the open position dimension D is 0.20~0.30







When the locking mechanism is in the closed position dimension D is 0.000

Ordering Information: 2636S**H00*

1.**=No. of circuits

2.*: 0=With post ; W=Without post


RoHS COMPLIANT

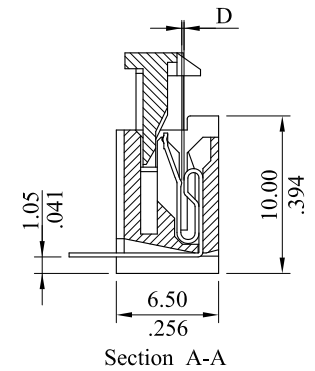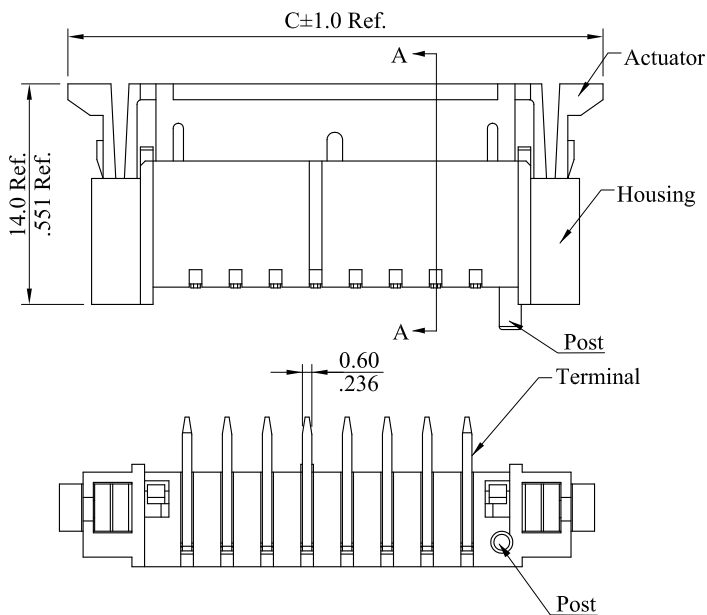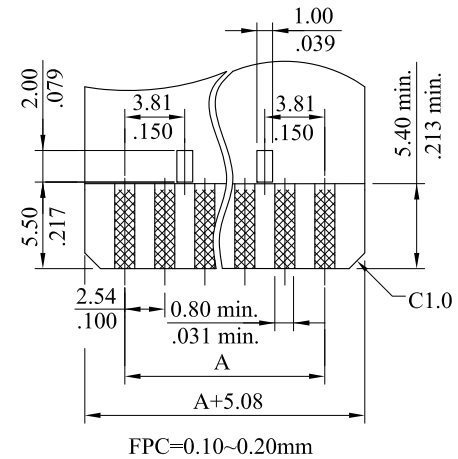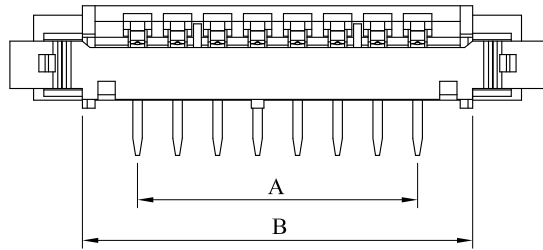

20	48.26(1.900)	55.26(2.176)	64.44(2.538)
19	45.72(1.800)	52.72(2.076)	61.92(2.438)
18	43.18(1.700)	50.18(1.976)	59.38(2.338)
17	40.64(1.600)	47.64(1.876)	56.84(2.238)
16	38.10(1.500)	45.10(1.776)	54.30(2.138)
15	35.56(1.400)	42.56(1.676)	51.76(2.038)
14	33.02(1.300)	40.02(1.576)	49.22(1.938)
13	30.48(1.200)	37.48(1.476)	46.68(1.838)
12	27.94(1.100)	34.94(1.376)	44.14(1.738)
11	25.40(1.000)	32.40(1.276)	41.60(1.638)
10	22.86(.900)	29.86(1.176)	39.06(1.538)
9	20.32(.800)	27.32(1.076)	36.52(1.438)
8	17.78(.700)	24.78(.976)	33.98(1.338)
CIRCUITS	DIM.A	DIM.B	DIM.C

3	ACTUATOR	PBT		1
2	HOUSING	PBT		1
1	TERMINAL	C5191 1/2H	Tin	*
NO.	NAME	MATERIAL	FINISH	QTY.

J	ES130418	Delete error 3D view	LEOCO CORPORATION		
I	ES130112		GENERAL TOLERANCES: (UNLESS SPECIFIED)		
G	ES110412				
F	ES101227			mm	inch
A	DWG REL		1 PLACE	± 0.30	± --
			2 PLACES	± 0.20	± .012
			3 PLACES	± 0.10	± .008
REV.	ECO. NO.	DESCRIPTION	4 PLACES	± --	± .004
			ANGULAR ± (1°)		

APPROVED:		PART NO.:			
Chard		2636S**H00*			
DATE: 04/1913		TITLE: 2.54mm FPC connector			
CHECKED:					
Smile		DRAWING NO.: 263602S			
DATE: 04/1913					
DRAWN:		263602S			
Chaos					
DATE: 04/1913					
	UNITS	SCALE	SIZE	SHEET	REV.
	mm inch	2:1	A4	1/1	J