


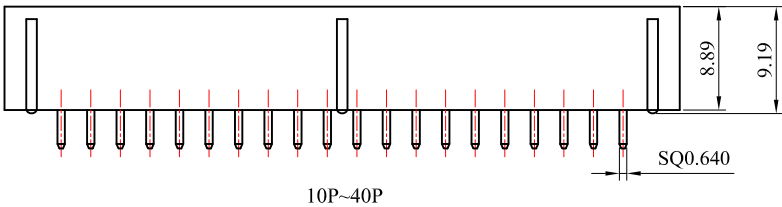

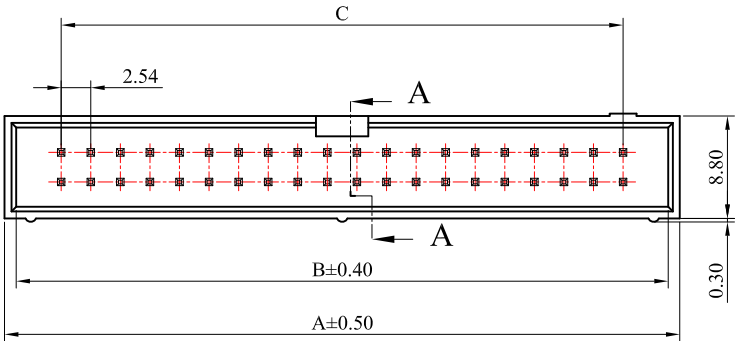


REV.	ECO. NO.	DESCRIPTION	DATE
A	DWG. REL.	APPROVED	
M	ES060341		2006.03.29
N	ES090113		2009.01.09
O	ES101227		2010.12.22
P	ES171110	Change to new drawing format C-5Area:3.2-->3.0, B-5Area:6.3-->6.4	2018.01.04
Q	ES221206	D-6Area: Add 6P&8P View D-7Area: Add 6P&8P DIMENSIONS	2022.12.08


Note:
Material:
Insulator: Thermoplastic, UL94V-0, Black
Contact: Brass

General part number:
3675P * * V * 00
1 2
1.No.of circuits
2.Plating:
T= Tin plated 120μ " min over 30μ " min. nickel overall
U= Gold flash over 30μ " min. nickel overall

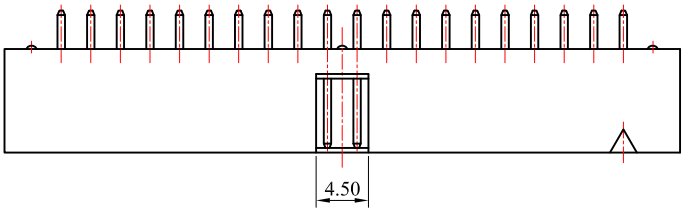

40	58.0	56.00	48.26
34	50.4	48.38	40.64
30	45.3	43.30	35.56
26	40.2	38.22	30.48
24	37.7	35.68	27.94
20	32.6	30.60	22.86
16	27.5	25.52	17.78
14	25.0	22.98	15.24
10	19.9	17.90	10.16
08	17.3	15.36	7.62
06	14.8	12.82	5.08

CIRCUITS	DIM "A"	DIM "B"	DIM "C"
DIMENSIONS TABLE			

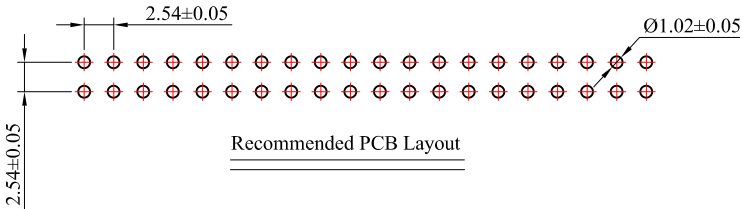

Recommended PCB Layout

TOLERANCE UNLESS OTHERWISE SPECIFIED			LEOCO CORPORATION http://www.leoco.com.tw			
mm	mm	inch	APPROVED BY:	DATE:	TITLE:	
1 PLACE	± 0.30	± ---	Chard	2022.12.09		
2 PLACES	± 0.20	± ---	Angel	2022.12.09	2.54mm PITCH BOX HEADER	
3 PLACES	± 0.10	± ---	Spring	2022.12.08		
4 PLACES	± ---	± ---	SIZE:	SCALE:	DRAWING NO.: 367506S	
ANGULAR ±1°			A3	1:1		
					REV.: Q	SHEET: 1 OF 1