

SPECIFICATIONS:

Current Rating :15 A AC , DC
 Voltage Rating :600V AC , DC
 Temperature Range : -25°C to +85°C
 Contact Resistance :3.5 mΩ MAX
 Insulation Resistance : 1000MΩ min
 Withstanding Voltage :5000 V AC/minute
 PIN Material : Brass
 Material : Nylon66 , UL94V-0
 Color : White

Ordering information:

6350 P ** V * 01
 1 2






RoHS COMPLIANT

1. No.of circuits

2. Plating:



0 = Tin plated 120u"min. over 30u"min. nickel overall

U= Gold flash over 30u"min. nickel overall

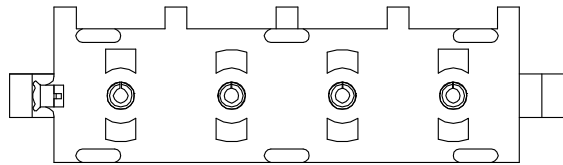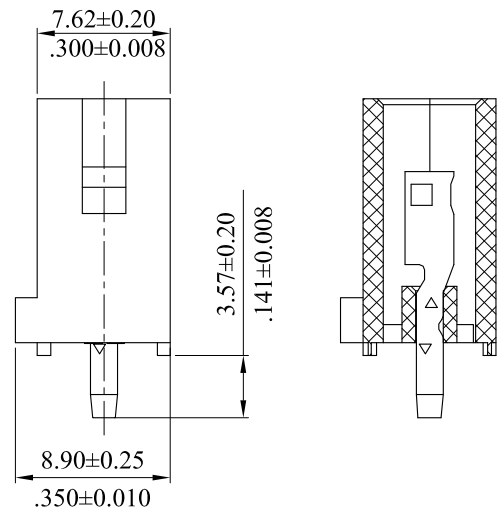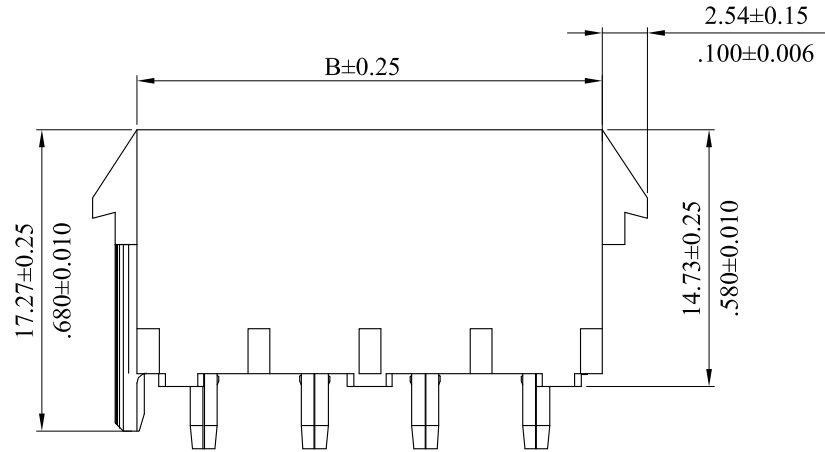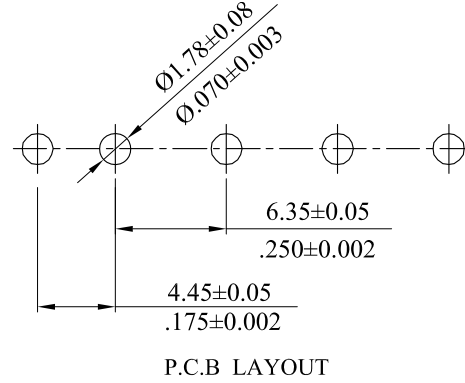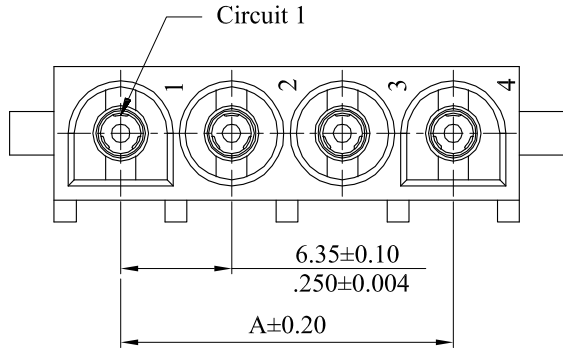

Ordering Information & Dimensions

PART NO .	Dimensions	
	A	B
6350P02V*01	6.35	13.97
6350P03V*01	12.70	20.32
6350P04V*01	19.05	26.67
6350P05V*01	25.40	33.02
6350P06V*01	31.75	39.37
6350P08V*01	44.45	52.07

				 LEOCO CORPORATION			APPROVED: BRADY		PART NO.: 6350P**V*01				
				GENERAL TOLERANCES: (UNLESS SPECIFIED)			DATE:		TITLE: 6.35 PITCH WAFER 180° SINGLE ROW				
							CHECKED: CHARD						
					mm	inch	DATE:		DRAWING NO.: 635002S				
				1 PLACE	± 0.30	± — —	DRAWN: SAM						
A	DWG REL			2 PLACES	± 0.20	± .012	DATE: 2011.10.27						
		3 PLACES	± 0.10	± .008									
		4 PLACES	± — —	± .004									
REV.	ECO. NO.	CHG.	APP.	ANGULAR ± (1°)					UNITS mm inch	SCALE 4:1	SIZE A4	SHEET 1/1	REV. A