


REV.	ECO. NO.	DESCRIPTION	DATE
A	DWG. REL.	APPROVED	2016.08.22
B	ES250601	Adjust the view and layout size	2025.06.04

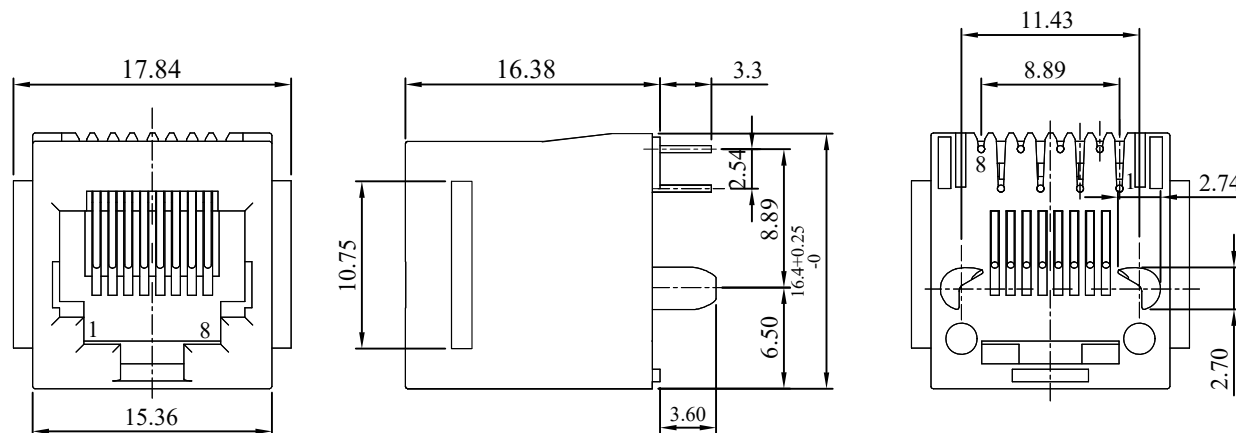

Note:

Specification:

Voltage Rating: 150V;

Current Rating: 1.5A;

Temperature Rating: -40°C~+85°C;

Material:

Insulator: Thermoplastic,UL 94V-0,Black;

Contact: Phosphor Bronze;

General part number:

7625- 08 ** * 0
1 2 3

1. No.of Positions:

08=8 position

2. No.of Contacts:

02=2 Contacts 06=6 Contacts

04=4 Contacts 08=8 Contacts


3. Plating:

U=Gold flash over 30μ" min. Nickel underplating overall

W=15μ" min. Gold over 30μ" min. Nickel underplating overall

Z=30μ" min. Gold over 30μ" min. Nickel underplating overall

G=50μ" min.Gold over 30μ"min. Nickel underplating overall

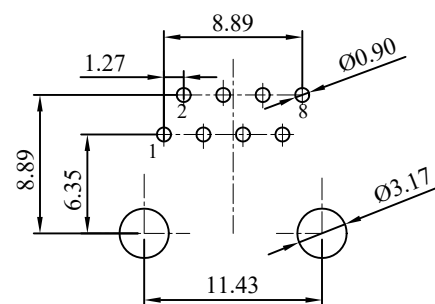

Recommended PCB Layout
Tolerances±0.05

TOLERANCE UNLESS OTHERWISE SPECIFIED			 LEOCO CORPORATION http://www.leoco.com.tw		
mm	mm	inch	APPROVED BY:	DATE:	TITLE: PCB Mount Telephone Jack
1 PLACE	± 0.30	± ---	Chard	2025.06.04	
2 PLACES	± 0.20	± ---	CHECKED BY:	DATE:	PART NO.: 7625-08***0
3 PLACES	± 0.10	± ---	Spring	2025.06.04	
4 PLACES	± ---	± ---	DRAWN BY:	DATE:	DRAWING NO.: 762513S
ANGULAR ±1°			Angel	2025.06.04	
SIZE: A3			SCALE: 1:1		REV.: B
			SHEET: 1 OF 1		