

Ordering Information



76B0-5 Z 00 * H
1 2 3 4 5 6

- Series No.
- 5 = Tap Up
- LED Code:
Z = Without LED
- Without schematic code:00
- Contact plating:
U = Gold flash over 30μ"min. nickel overall
Z = 30μ"min. gold over 30μ"min. nickel overall
F = Selective gold flash over 30μ" min. nickel plated overall
J = 15μ"min.selective gold plated over 30μ" min.nickel overall
K = 30μ"min.selective gold plated over 30μ" min.nickel overall
- H= Shell spring1.0 and Spring(Top+Side)



Material:

Plastic: High performance thermoplastic,UL 94V-0.
Shell: High performance copper alloy or stainless steel contacts
Contact: High performance copper alloy
Input Pin: High performance copper alloy

RoHS COMPLIANT

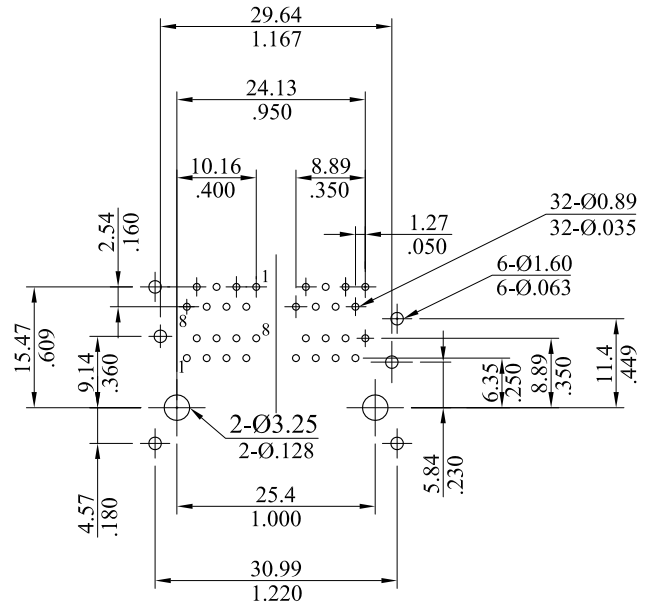

RECOMMENDED PCB PATTERN

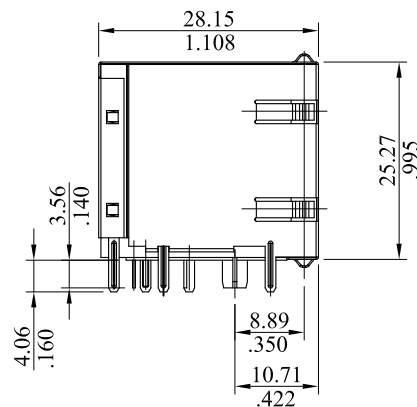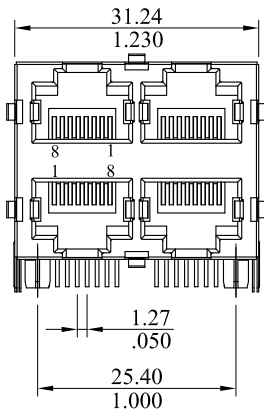

LEOCO CORPORATION

GENERAL TOLERANCES:
(UNLESS SPECIFIED)

	mm	inch
1 PLACE	± 0.30	± --
2 PLACES	± 0.20	± .012
3 PLACES	± 0.10	± .008
4 PLACES	± --	± .004

ANGULAR ± (1°)

APPROVED:


DATE:

CHECKED:

DATE:

DRAWN:

DATE:



UNITS
mm
inch

PART NO.:

76B0-5Z00*H

TITLE:

NETWORKING 8P8C RJ45

DRAWING NO.:

76B001S

SCALE

SIZE

SHEET

REV.

1:1

A4

1/1

A

REV.

ECO. NO.

CHG.

APP.

A

DWG REL