

RoHS COMPLIANT






Materials:
Contacts: Copper alloy
Insulator: High temperature thermoplastic UL 94V-0
Shell: Cold roller steel.

Finishes:
Contact: Gold flash.
Shell: Nickel plated.

Oder information:

DE-09 S K * R A 2
1 2 3 4 5 6 7

1. Series No.
2. S=Socket
3. K= Slim type
4. Plating
F= Selective gold over 30u"min. nickel overall
5. R= Riveted type
6. A= Foot print pitch =2.6mm(.102")
7. 2= L type clip

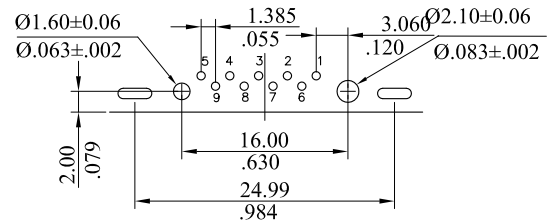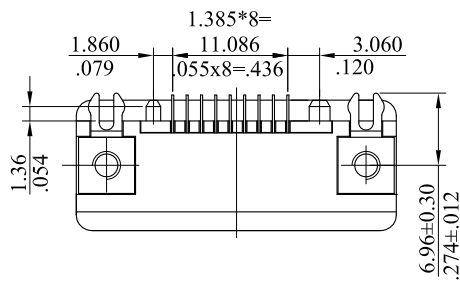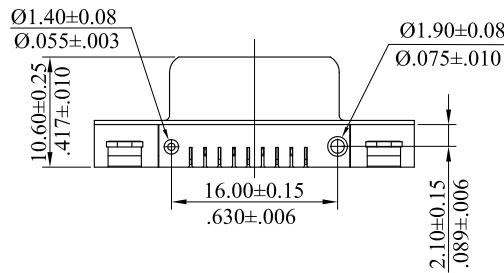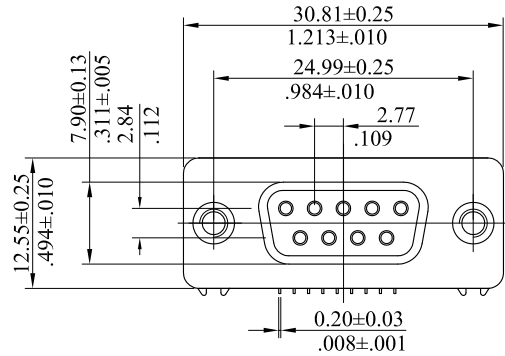

RECOMMENDED PCB LAYOUT

leoco LEOCO CORPORATION

GENERAL TOLERANCES:
(UNLESS SPECIFIED)

	mm	inch
1 PLACE	± 0.30	± --
2 PLACES	± 0.20	± .012
3 PLACES	± 0.10	± .008
4 PLACES	± --	± .004

ANGULAR ± (1°)

APPROVED:


DATE:

CHECKED:

DATE:

DRAWN:

DATE:



UNITS
mm
inch

PART NO.:

DE-09SKFRA2

TITLE:

D-SUB

DRAWING NO.:

DSK005S

SCALE	SIZE	SHEET	REV.
~	A4	1 / 1	A