


Ordering Information:

DE-09 P K F R A 2
1 2 3 4 5 6 7


1. DE-09=9 Positions
2. P=Plug
3. K=Slim type
4. F=Selective gold flash over 30~50μ" nickel overall
5. R=Riveted type
6. A=Foot print pitch=2.5mm(.098")
7. 2=L type clip

Material:

- * Insulator: PPS, UL 94V-0
- * Contact: Phosphor bronze
- * Shell: Steel; nickel plated

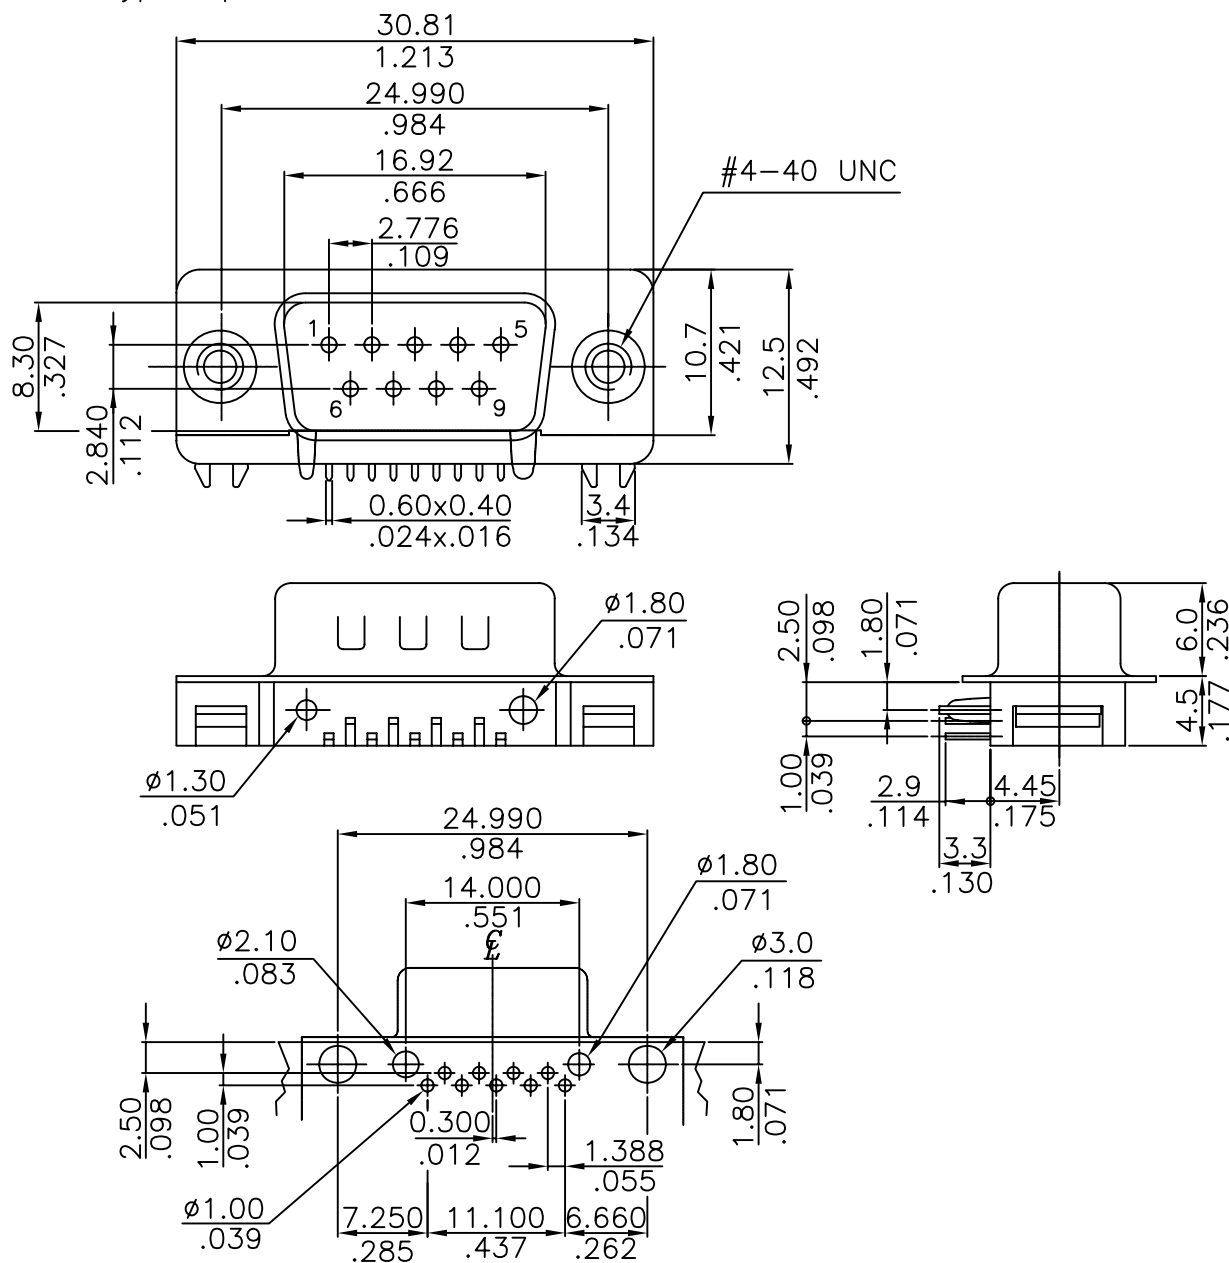

Recommended Hole Pattern

				 LECO CORPORATION		APPROVED BY:		PART NO.: DE-09PKFRA2				
				GENERAL TOLERANCE		CHECKED BY:		TITLE: SLIM D-SUB (R/A TYPE)				
				X. ±	X' ± 2°	DRAW BY:		DRAWING NO.: DPK003S				
B	E990112			.X ± $\frac{0.30}{.012}$	.X' ±			UNITS mm inch	SCALE 2:1	SIZE A4	SHEET 1/1	REV. B
A	DWG REL.			.XX ± $\frac{0.20}{.008}$	.XX' ±							
REV.	ECO. NO.	CHG	APPD.	.XXX± $\frac{0.10}{.004}$	.XXX'±							