


RoHS COMPLIANT

CUSTOMER DRAWING

REV.	ECO. NO.	DESCRIPTION	DATE
A	DWG REL	APPROVED	2026.01.08

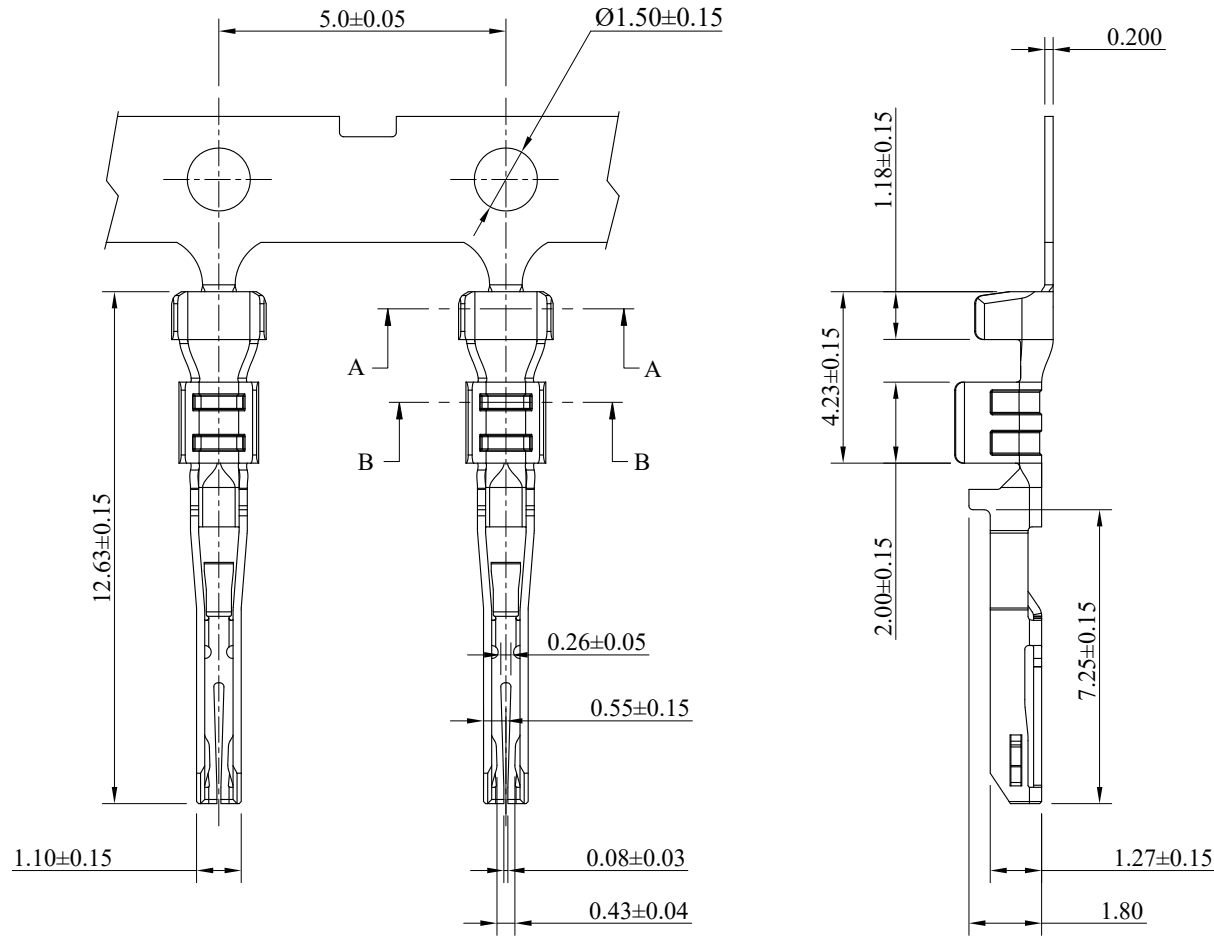

Specifications:

Current rating:6.5A AC/DC
Voltage rating:250V AC/DC
Contact resistance:10mΩ Max
Insulator resistance:1000MΩ Min
Withstanding Voltage:1500AC/minute
Temperature range:-40°C~+105°C

Gener part number:

2526T** *F0*
1 2 3


1.Material:

PB=Phosphor Bronze
NA=C7025


2.Planting:

0=Tin Plated
F=Selective Gold Flash
K=30μ"min.Selective Gold


3.Wire range:1=AWG20~22
2=AWG24~26



Section:A-A'



Section:B-B'



TOLERANCE UNLESS OTHERWISE SPECIFIED

mm	mm	inch
1 PLACE	± 0.30	± ---
2 PLACES	± 0.20	± ---
3 PLACES	± 0.10	± ---
4 PLACES	± ---	± ---

ANGULAR ±1°



LEOCO CORPORATION

<http://www.leoco.com.tw>

APPROVED BY: DATE:

Chard 2026.01.16

CHECKED BY: DATE:

Angel 2026.01.09

DRAWN BY: DATE:

Norah 2026.01.08

SIZE: A3

SCALE: 1:1



TITLE:

2.5mm Pitch Female
Crimping Terminal

PART NO.:

2526T***F0*

DRAWING NO.:

252605S

REV.:

A

SHEET:

1 OF 1