
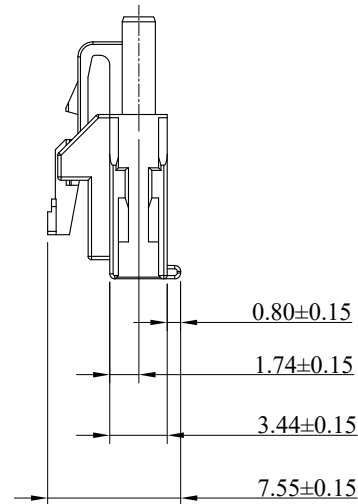
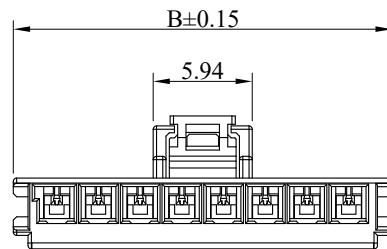


REV.	ECO. NO.	DESCRIPTION	DATE
A	DWG REL	APPROVED	2026.01.10

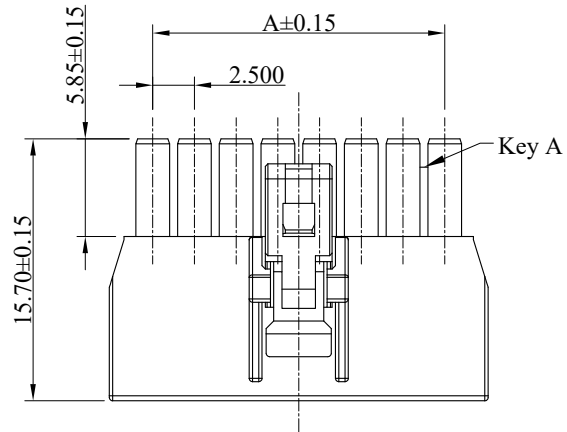

Material:

Insulator: High Temperature Plastic,UL94V-0,Black

Specifications:

Current rating:6.5A AC/DC

Voltage rating:250V AV/DC

Temperature range:-40°C~105°C

Contact Resistance:10mΩ Max

Insulation Resistance:1000MΩ Min

Withstanding voltage:1500V AC/minute


Gener part number:

2526S**F00A
1


1.No.of Circuits(02~08)

A=2.50×No.of spaces


B=A+5.2




02P




03P




04P




05P



06P



07P



08P

TOLERANCE UNLESS OTHERWISE SPECIFIED			 LECO CORPORATION http://www.leoco.com.tw			
mm	mm	inch	APPROVED BY: Chard	DATE: 2026.01.16	TITLE: 2.5mm Pitch Single Row Housing	
1 PLACE	± 0.30	± --	CHECKED BY: Angel	DATE: 2026.01.14		
2 PLACES	± 0.20	± --	DRAWN BY: Norah	DATE: 2026.01.10	PART NO.: 2526S**F00A	
3 PLACES	± 0.10	± --	SIZE: A3	SCALE: 1:1	DRAWING NO.: 252606S	REV.: A
4 PLACES	± --	± --	ANGULAR ±1°		SHEET: 1 OF 1	