
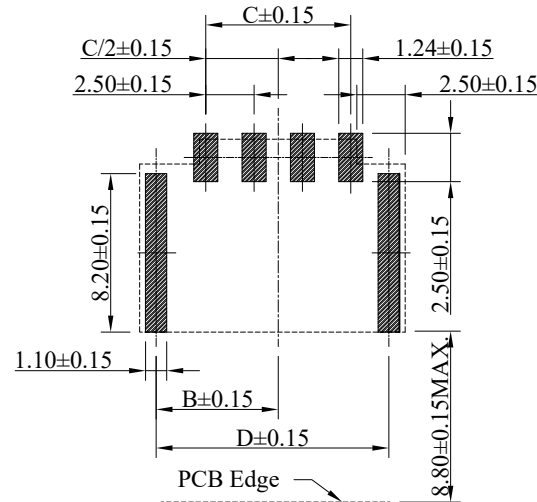


REV.	ECO. NO.	DESCRIPTION	DATE
A	DWG REL	APPROVED	2026.01.10

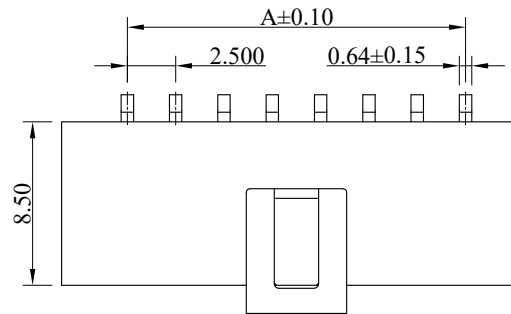

Recommended PCB Layout

Material:

Insulator: High Temperature Plastic, UL94V-0, Natural
Contact: Brass

Specifications:

Current rating: 6.5A AC/DC
Voltage rating: 250V AC/DC
Contact resistance: 10mΩ Max
Insulator resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Temperature range: -40°C ~ +105°C

Gener part number:

2526P**MH*B
1 2

1.No.of Circuits(02~08)

2.Plating:


0=Matte Tin Plated
U=Gold Flash

A=2.50×No.of spaces



B=A/2+2.57

C=A+6.24


D=A+4.54

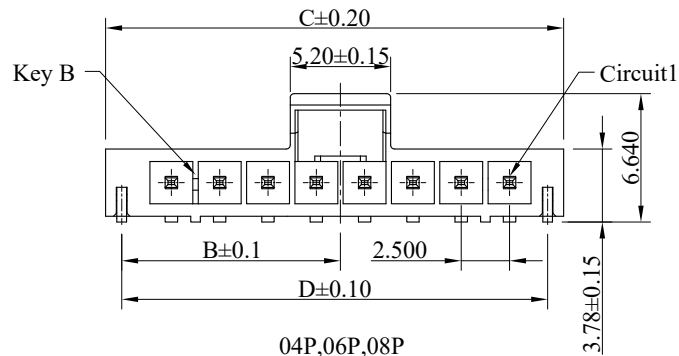


04P, 06P, 08P

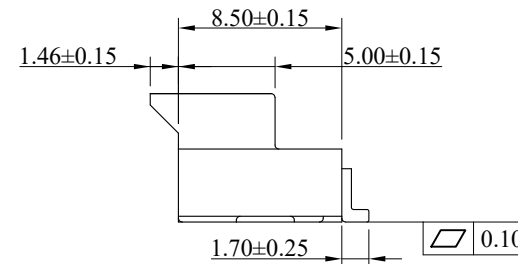

02P

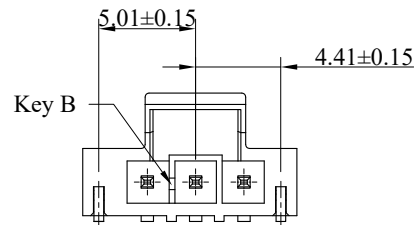

03P

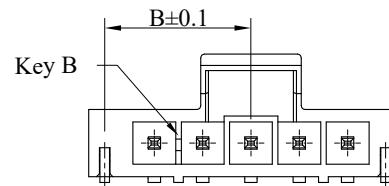

05P, 07P

TOLERANCE UNLESS OTHERWISE SPECIFIED			 LEOCO CORPORATION http://www.leoco.com.tw		
mm	mm	inch	APPROVED BY:	DATE:	TITLE:
1 PLACE	± 0.30	± --	Chard	2026.01.16	2.5mm Pitch Single Row Power Wafer SMT Type Right Angle Type
2 PLACES	± 0.20	± --	CHECKED BY:	DATE:	
3 PLACES	± 0.10	± --	Angel	2026.01.14	PART NO.: 2526P**MH*B
4 PLACES	± --	± --	DRAWN BY:	DATE:	
ANGULAR ±1°			Norah	2026.01.10	DRAWING NO.: 252609S
			SIZE: A3	SCALE: 1:1	
					REV.: A
					SHEET: 1 OF 1