
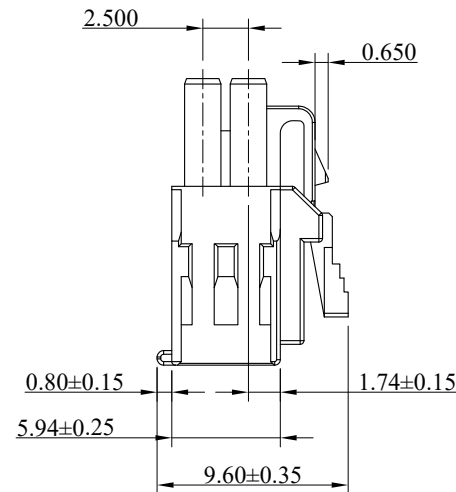
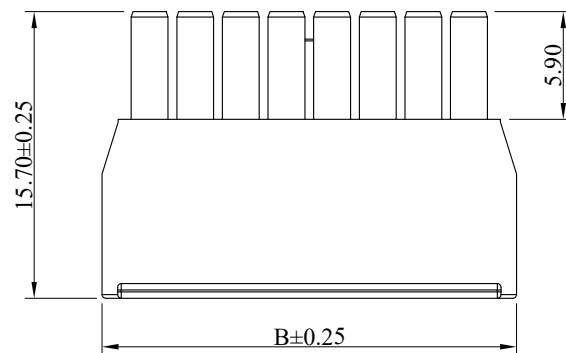


RoHS COMPLIANT

CUSTOMER DRAWING

REV.	ECO. NO.	DESCRIPTION	DATE
A	DWG REL	APPROVED	2025.12.15

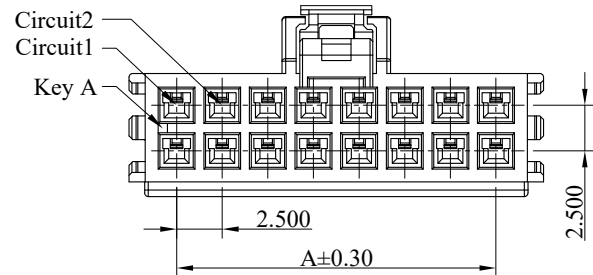


Material:
Insulator: High Temperature Plastic,UL94V-0, Black

Specifications:
Current rating:6.5A AC/DC
Voltage rating:250V AC/DC
Temperature range:-40°C~105°C
Contact resistance:10mΩ Max
Insulation resistance:1000MΩ Min
Withstanding voltage:1500V AC/minute


Gener part number:
2526S**F02A
1

1.No.of Circuits(04~16)


A=2.50×No.of spaces
B=A+5.20




2×02P




2×03P



2×04P



2×06P



2×04P~2×08P

TOLERANCE UNLESS OTHERWISE SPECIFIED			 LEOCO CORPORATION http://www.leoco.com.tw			
mm	mm	inch	APPROVED BY:	DATE:	TITLE: 2.5mm Pitch Dual Row Housing	
1 PLACE	± 0.30	± —	Chard	2026.01.16		
2 PLACES	± 0.20	± —	CHECKED BY:	DATE:	PART NO.: 2526S**F02A	
3 PLACES	± 0.10	± —	Angel	2026.01.09		
4 PLACES	± —	± —	DRAWN BY:	DATE:	DRAWING NO.: 252610S	
ANGULAR ±1°			Norah	2025.12.15		
SIZE: A3	SCALE: 1:1		REV.: A		SHEET: 1 OF 1	