

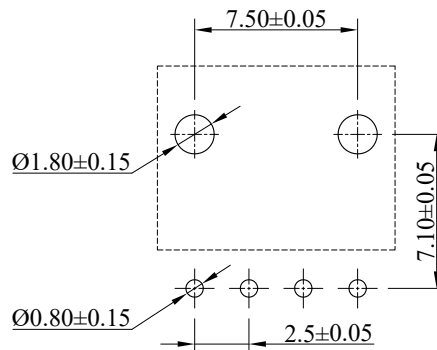



REV.	ECO. NO.	DESCRIPTION	DATE
A	DWG REL	APPROVED	2026.01.08

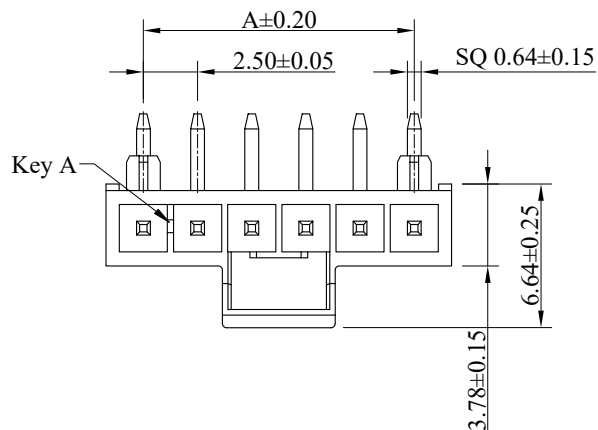

Recommended PCB Layout

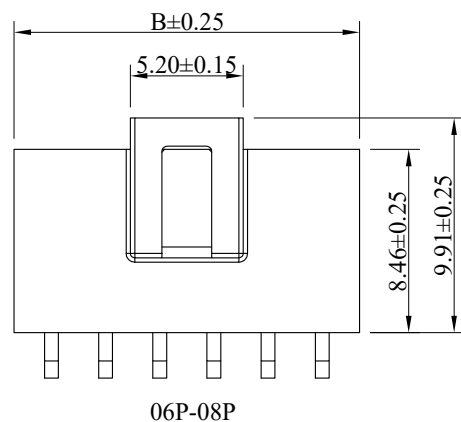

06P-08P

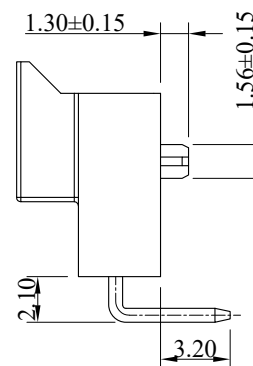

Material:

Insulator: High Temperature Plastic, UL94V-0, Black
Contact: Brass

Specifications:

Current rating: 6.5A AC/DC
Voltage rating: 250V AC/DC
Contact resistance: 10mΩ Max
Insulator resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Temperature range: -40°C ~ +105°C

Gener part number:

2526P**H*0A
1 2

1.No.of Circuits(02~08)

2.Plating: 0= Tin Plated


U= Gold Flash

F= Selective Gold Flash


J= Selective 15u"min. Gold

A= 2.50×No.of spaces


B= A+3.45




02P



03P



04P



05P

TOLERANCE UNLESS OTHERWISE SPECIFIED			LEOCO CORPORATION http://www.leoco.com.tw					
mm	mm	inch	APPROVED BY: DATE:		TITLE: 2.5mm Pitch Single Row Wafer Right Angle Type R/A Type			
1 PLACE	± 0.30	± —	Chard	2026.01.16				
2 PLACES	± 0.20	± —	CHECKED BY: DATE:		PART NO.: 2526P**H*0A			
3 PLACES	± 0.10	± —	Angel	2026.01.09				
4 PLACES	± —	± —	DRAWN BY: DATE:					
			Norah	2026.01.08				
ANGULAR ±1°			SIZE: A3	SCALE: 1:1		DRAWING NO.: 252612S	REV.: A	SHEET: 1 OF 1