






REV.	ECO. NO.	DESCRIPTION	DATE
A	DWG REL	APPROVED	2026.01.10

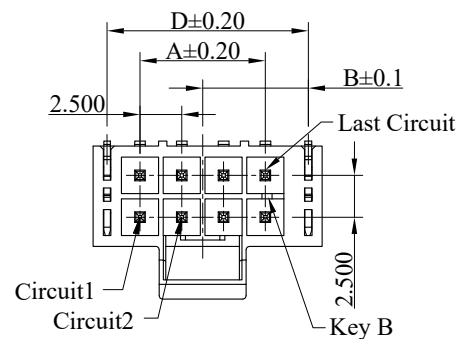

04P,08P,12P,16P



06P,10P,14P

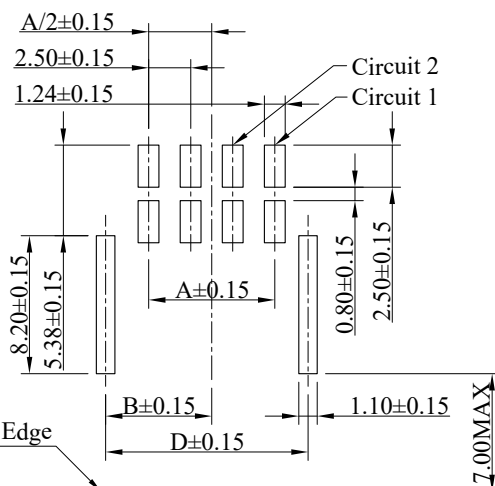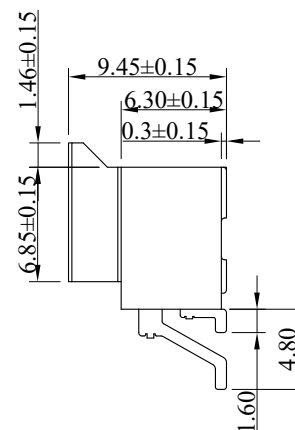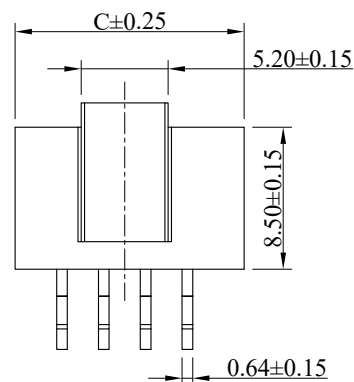

Recommended PCB Layout

Material:

Insulator: High Temperature Plastic, UL94V-0, Natural
Contact: Brass/Matte Tin Plated

Specifications:

Current rating: 6.5A AC/DC
Voltage rating: 250V AC/DC
Contact resistance: 10mΩ Max
Insulator resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Temperature range: -40°C ~ +105°C

Gener part number:

2526P**MH2B
I

1.No.of Circuits(04~16)

$A = 2.50 \times \text{No.of spaces}$

$B = A/2 + 2.57$

$C = A + 6.24$

$D = A + 4.54$

TOLERANCE UNLESS OTHERWISE SPECIFIED			 LEOCO CORPORATION http://www.leoco.com.tw			
mm	mm	inch	APPROVED BY:	DATE:	TITLE:	
1 PLACE	± 0.30	± ---	Chard	2026.01.16	2.5mm Pitch Dual Row Power Wafer SMT Type Right Angle Type	
2 PLACES	± 0.20	± ---	Angel	2026.01.14		
3 PLACES	± 0.10	± ---	DRAWN BY: Norah	DATE: 2026.01.10	PART NO.: 2526P**MH2B	
4 PLACES	± ---	± ---			DRAWING NO.: 252615S	
ANGULAR ±1°			SIZE: A3	SCALE: 1:1		REV.: A
					SHEET: 1 OF 1	