




REV.	ECO. NO.	DESCRIPTION	DATE
A	DWG REL	APPROVED	2026.01.10

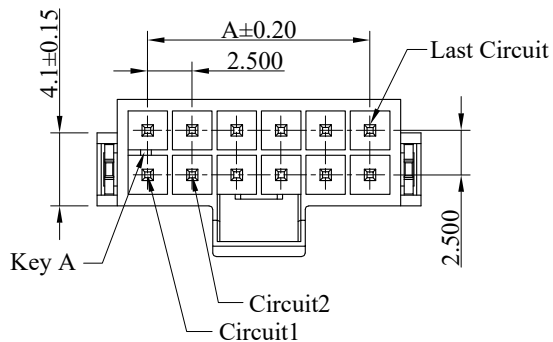


06P,10P,14P

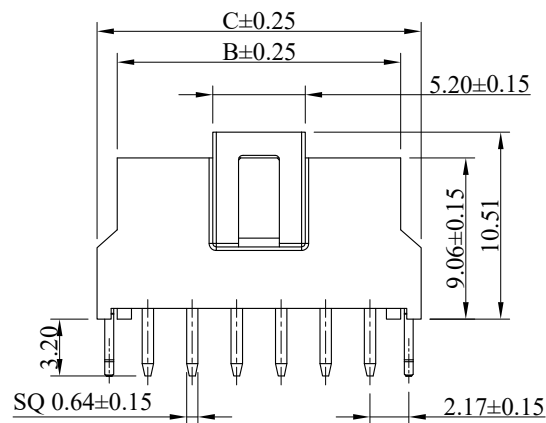

04P,08P,12P,16P



06P,10P,14P

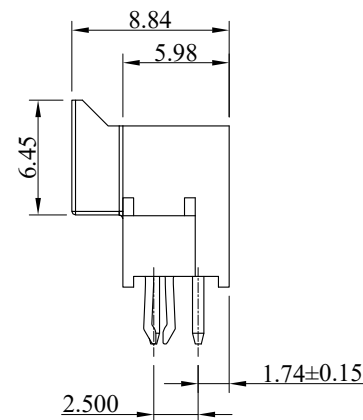

Material:

Insulator: High Temperature Plastic, UL94V-0, Black
Contact: Brass/Tin Plated

Specifications:


Current rating: 6.5A AC/DC
Voltage rating: 250V AC/DC
Contact resistance: $10\text{m}\Omega$ Max
Insulator resistance: $1000\text{M}\Omega$ Min
Withstanding Voltage: 1500V AC/minute
Temperature range: $-40^\circ\text{C} \sim +105^\circ\text{C}$

Gener part number:

2526P**V02K

1

1.No.of Circuits(04~16)

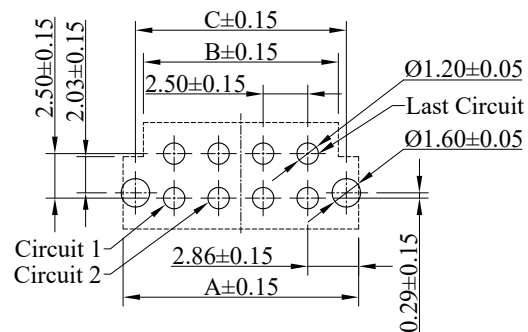 $A = 2.50 \times \text{No. of spaces}$ $B = A + 3.44$ $C = A + 5.72$ 

Recommended P.C.B Layout

TOLERANCE UNLESS
OTHERWISE SPECIFIED

mm	mm	inch
1 PLACE	± 0.30	$\pm \text{---}$
2 PLACES	± 0.20	$\pm \text{---}$
3 PLACES	± 0.10	$\pm \text{---}$
4 PLACES	$\pm \text{---}$	$\pm \text{---}$

ANGULAR $\pm 1^\circ$ 

LEOCO CORPORATION

<http://www.leoco.com.tw>APPROVED BY: Chard
DATE: 2026.01.16CHECKED BY: Angel
DATE: 2026.01.14DRAWN BY: Norah
DATE: 2026.01.10

SIZE: A3

SCALE: 1:1



TITLE:

2.5mm Pitch Power Wafer
Straight Type

PART NO.:

2526P**V02K

DRAWING NO.: 252616S

REV.: A

SHEET: 1 OF 1