

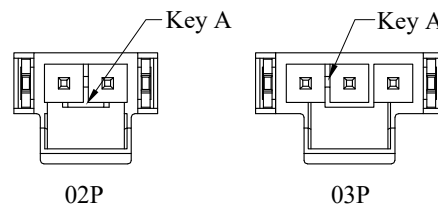


REV.	ECO. NO.	DESCRIPTION	DATE
A	DWG REL	APPROVED	2026.01.08

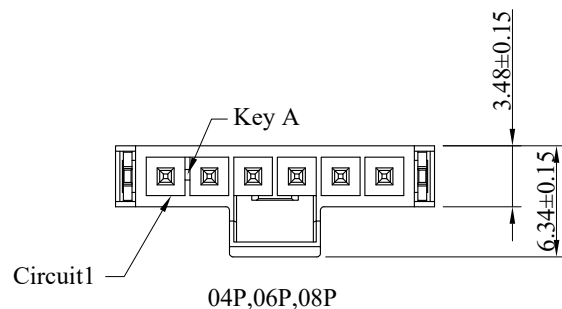

Material:

Insulator: High Temperature Plastic, UL94V-0, Black
Contact: Brass/Tin Plated

Specifications:

Current rating: 6.5A AC/DC
Voltage rating: 250V AC/DC
Contact resistance: 10mΩ Max
Insulator resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Temperature range: -40°C ~ +105°C

Gener part number:

2526P**V00K
1






1.No.of Circuits(02~08)

A=2.50×No.of spaces

B=A+3.44

C=A+5.92

D=A+4.34

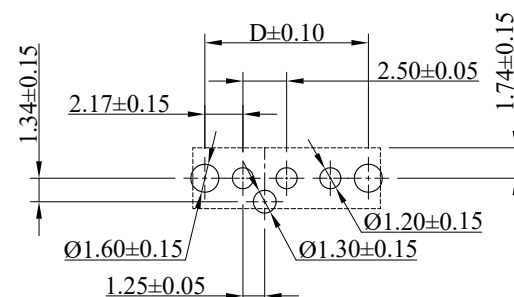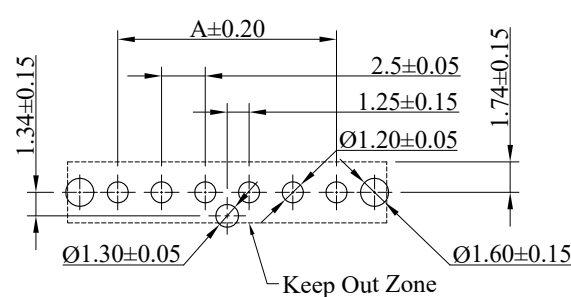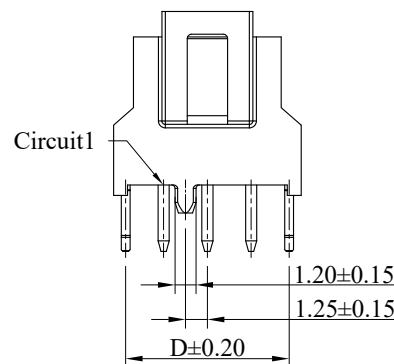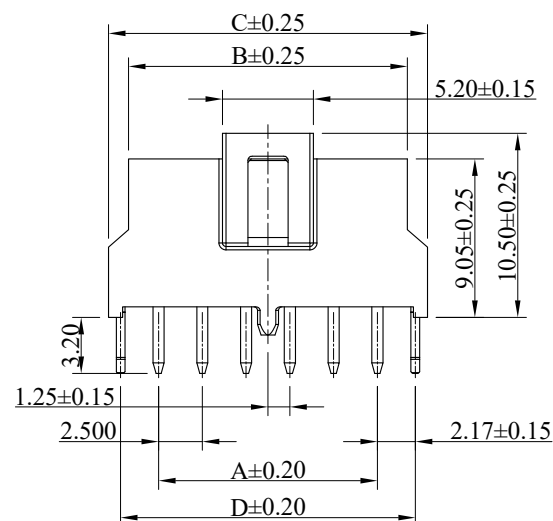

02P, 04P, 06P, 08P

03P, 05P, 07P

Recommended P.C.B Layout

TOLERANCE UNLESS OTHERWISE SPECIFIED			LEOCO CORPORATION http://www.leoco.com.tw		
mm	mm	inch	APPROVED BY:	DATE:	TITLE:
1 PLACE	± 0.30	± ---	Chard	2026.01.16	2.5mm Pitch Single Row Straight Type Connector
2 PLACES	± 0.20	± ---	Angel	2026.01.19	
3 PLACES	± 0.10	± ---	Norah	2026.01.08	PART NO.: 2526P**V00K
4 PLACES	± ---	± ---	SIZE: A3	SCALE: 1:1	DRAWING NO.: 252618S
ANGULAR ±1°			REV.: A		
			SHEET: 1 OF 1		