




REV.	ECO. NO.	DESCRIPTION	DATE
A	DWG REL	APPROVED	2026.01.10




04P

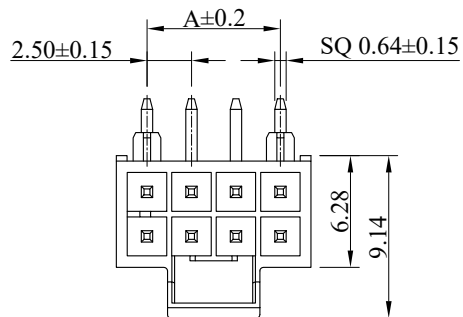


08P,12P,16P




06P,10P,14P




04P

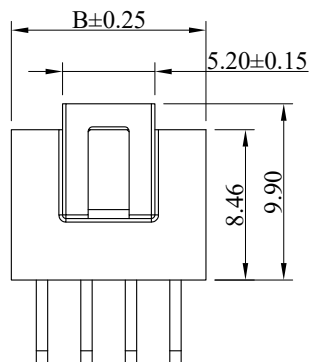

06P-18P



Recommended P.C.B Layout

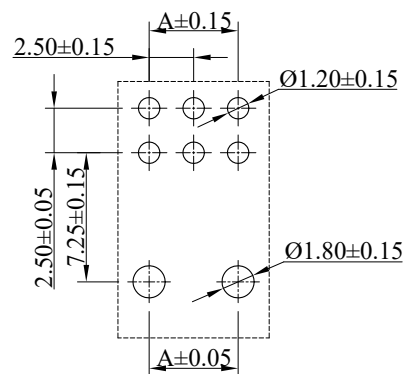

Material:

Insulator:High Temperature Plastic,UL94V-0,Black
Contact:Brass

Specifications:

Current rating:6.5A AC/DC
Voltage rating:250V AC/DC
Contact resistance:10mΩ Max
Insulator resistance:1000MΩ Min
Withstanding Voltage:1500V AC/minute
Temperature range:-40°C~+105°C

Gener part number:

2526P**H*2A
1 2

1.No.of Circuits(04~16)

2.Plating:

0=Tin Plated

U=Gold Flash

J=Selective 15u"min.Gold

A=2.50×No.of spaces

B=A+3.44

TOLERANCE UNLESS OTHERWISE SPECIFIED			 LEOCO CORPORATION <i>http://www.leoco.com.tw</i>		
mm	mm	inch	APPROVED BY:	DATE:	TITLE:
1 PLACE	± 0.30	± — —	Chard	2026.01.16	2.5mm Pitch Double Row Wafer R/A Type
2 PLACES	± 0.20	± — —	CHECKED BY:	DATE:	
3 PLACES	± 0.10	± — —	Angel	2026.01.14	PART NO.: 2526P**H*2A
4 PLACES	± — —	± — —	DRAWN BY:	DATE:	
ANGULAR ±1°			Norah	2026.01.10	DRAWING NO.: 252621S
			SIZE:	SCALE:	
			A3	1:1	
					
					SHEET:
					1 OF 1