



REV.	ECO. NO.	DESCRIPTION	DATE
A	DWG REL	APPROVED	2026.01.10

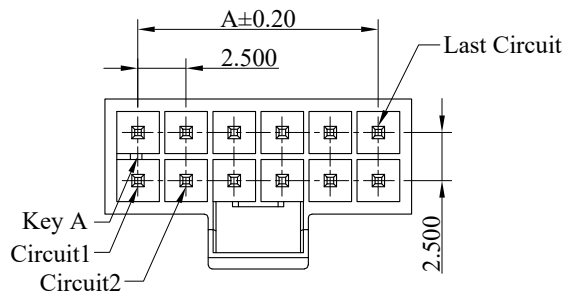

04P,08P,12P,16P



06P,10P,14P

Material:

Insulator:High Temperature Plastic,UL94V-0,Black
Contact:Brass

Specifications:

Current rating:6.5A AC/DC
Voltage rating:250V AC/DC
Contact resistance:10mΩ Max
Insulator resistance:1000MΩ Min
Withstanding Voltage:1500V AC/minute
Temperature range:-40°C~+105°C

Gener part number:

2526P**V*2A
1 2

1.No.of Circuits(04~16)

2.Plating:

0=Tin Plated


U=Gold Flash

W=15μ"min.Gold


J=15μ"min.Selective Gold

A=2.50×No.of spaces



B=A+3.44

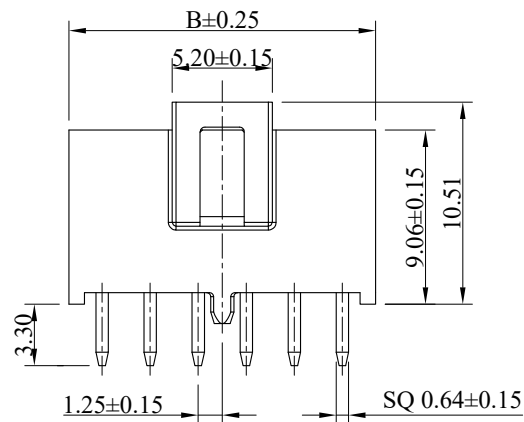


04P,08P,12P,16P

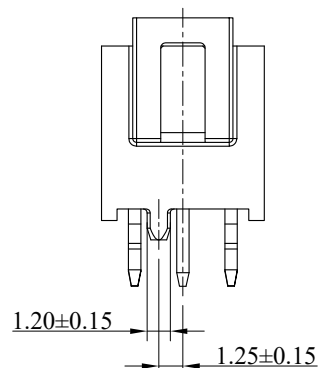

06P,10P,14P

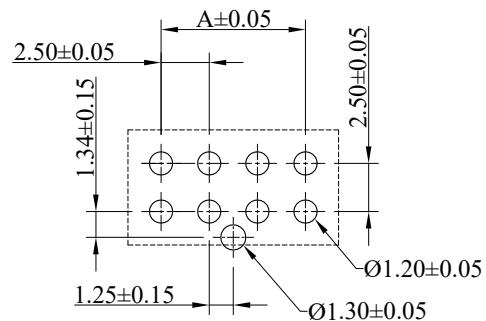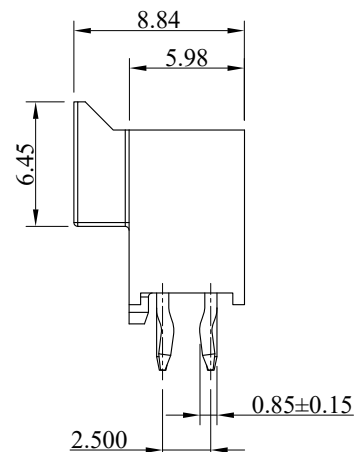

04P,08P,12P,16P

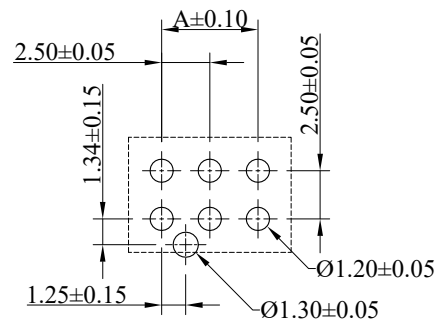

06P,10P,14P

Recommended P.C.B Layout

TOLERANCE UNLESS OTHERWISE SPECIFIED			LEOCO CORPORATION http://www.leoco.com.tw		
mm	mm	inch	APPROVED BY:	DATE:	TITLE:
1 PLACE	± 0.30	± —	Chard	2026.01.16	2.5mm Pitch Dual Row Wafer Straight Type
2 PLACES	± 0.20	± —	Checked BY:	DATE:	
3 PLACES	± 0.10	± —	Angel	2026.01.14	PART NO.: 2526P**V*2A
4 PLACES	± —	± —	Norah	2026.01.10	
ANGULAR ±1°			SIZE:	SCALE:	DRAWING NO.:
			A3	1:1	252623S
					REV.:
					A
					SHEET:
					1 OF 1