

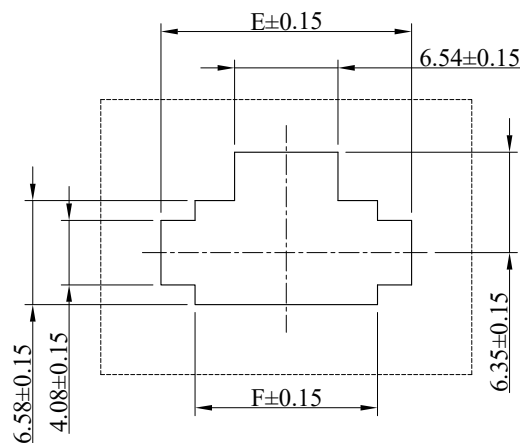
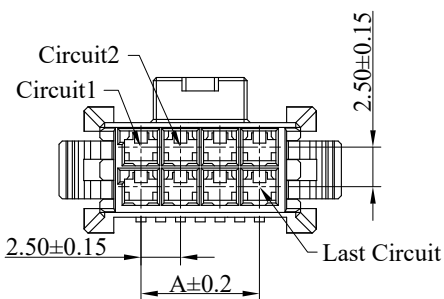
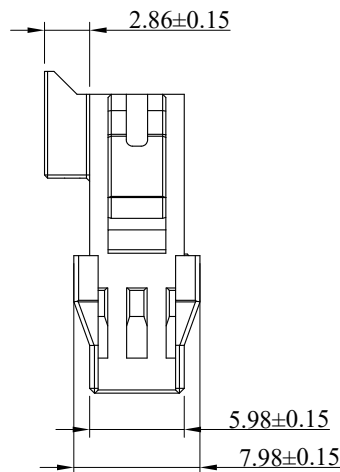
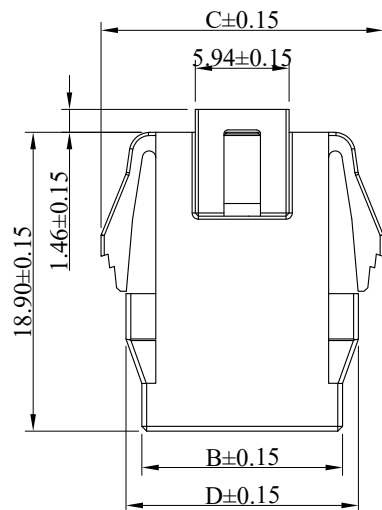


REV.	ECO. NO.	DESCRIPTION	DATE
A	DWG REL	APPROVED	2026.01.08

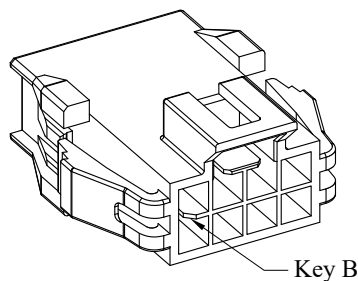

Recommended PCB Layout
(Thickness=1.2~2.2mm)

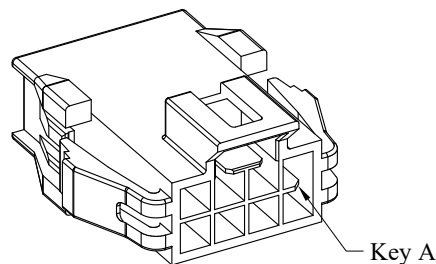

Material:

Insulator: Thermoplastic, UL94V-0

Specifications:

Current rating: 6.5A AC/DC

Voltage rating: 250V AC/DC

Temperature range: -40°C~105°C

Contact resistance: 10mΩ Max

Insulation resistance: 1000MΩ Min

Withstanding voltage: 1500V AC/minute

Gener part number:

2526S**M02*
1 2

1.No.of Circuits(04~16)

2.Option:

A=Key A, Black

B=Key B, Natural

A=2.50×No.of spaces

B=A+5.20

C=A+10.06

D=A+7.20

E=A+8.36

F=A+4.04

TOLERANCE UNLESS OTHERWISE SPECIFIED			 LEOCO CORPORATION <i>http://www.leoco.com.tw</i>				
mm	mm	inch	APPROVED BY: DATE:		TITLE: 2.5mm Pitch Double Row Plug Housing		
1 PLACE	± 0.30	± ---	Chard	2026.01.16			
2 PLACES	± 0.20	± ---	CHECKED BY: DATE:		PART NO.: 2526S**M02*		
3 PLACES	± 0.10	± ---	Angel	2026.01.09			
4 PLACES	± ---	± ---	DRAWN BY: DATE:				
			Norah	2026.01.08			
ANGULAR ±1°			SIZE:	SCALE:	DRAWING NO.:	REV.:	SHEET:
			A3	1:1	252626S	A	1 OF 1
							