
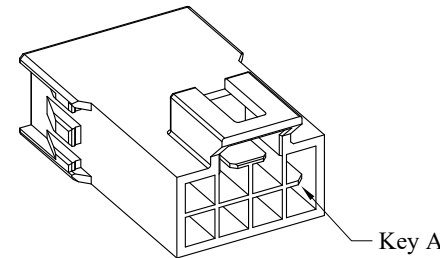

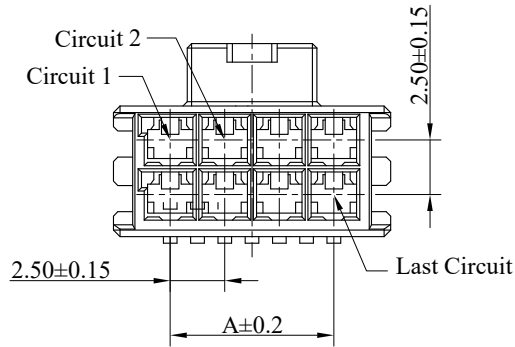
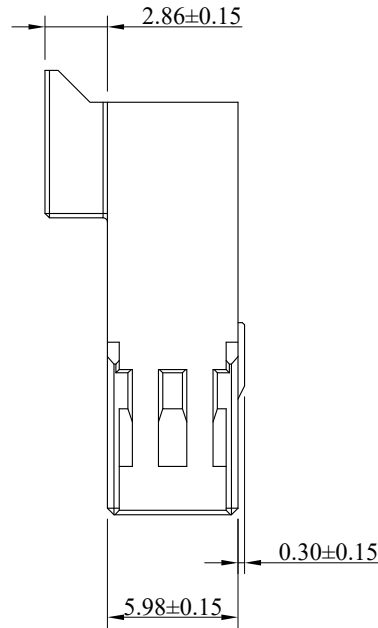


RoHS COMPLIANT

CUSTOMER DRAWING

REV.	ECO. NO.	DESCRIPTION	DATE
A	DWG REL	APPROVED	2025.12.19

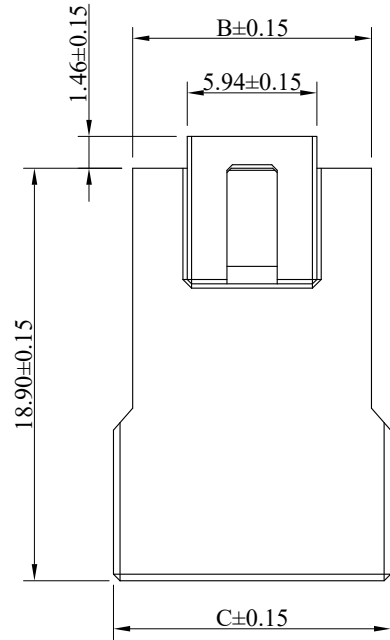

Material:
Insulator: Thermoplastic, UL94V-0

Specifications:
Current rating: 6.5A AC/DC
Voltage rating: 250V AC/DC
Temperature range: -40°C~105°C
Contact resistance: 10mΩ Max
Insulation resistance: 1000MΩ Min
Withstanding voltage: 1500V AC/minute

Gener part number:
2526S**M02*
1 2

1.No.of Circuits(04~16)
2.Option:
C=Key A,Black,without wing
D=Key B,Natural,without wing

A=2.50×No.of spaces
B=A+3.44
C=A+5.20

TOLERANCE UNLESS OTHERWISE SPECIFIED			 LECO CORPORATION http://www.leoco.com.tw			
mm	mm	inch	APPROVED BY:	DATE:	TITLE: 2.5mm Pitch Double Row Plug Housing	
1 PLACE	± 0.30	± --	Chard	2026.01.16		
2 PLACES	± 0.20	± --	CHECKED BY:	DATE:	PART NO.: 2526S**M02*	
3 PLACES	± 0.10	± --	Angel	2026.01.09		
4 PLACES	± --	± --	DRAWN BY:	DATE:	DRAWING NO.: 252627S	
ANGULAR ±1°			Norah	2025.12.19		
SIZE: A3	SCALE: 1:1			DRAWING NO.: 252627S	REV.: A	SHEET: 1 OF 1