






REV.	ECO. NO.	DESCRIPTION	DATE
A	DWG REL	APPROVED	2026.01.10

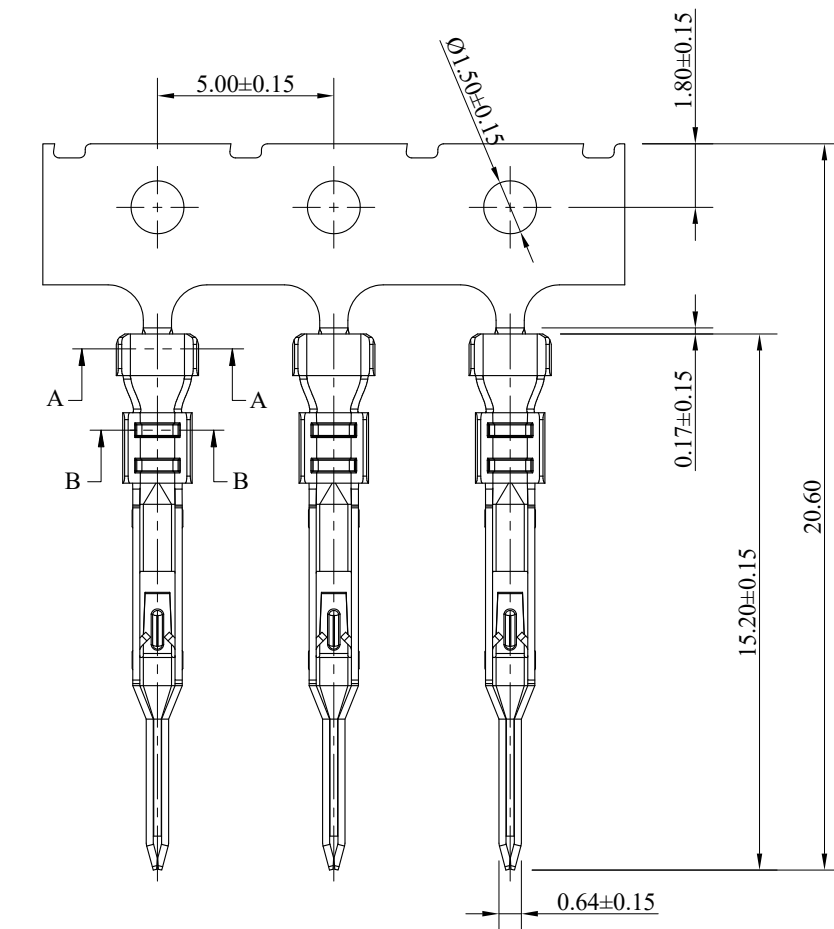

Section:A-A'



Section:B-B'

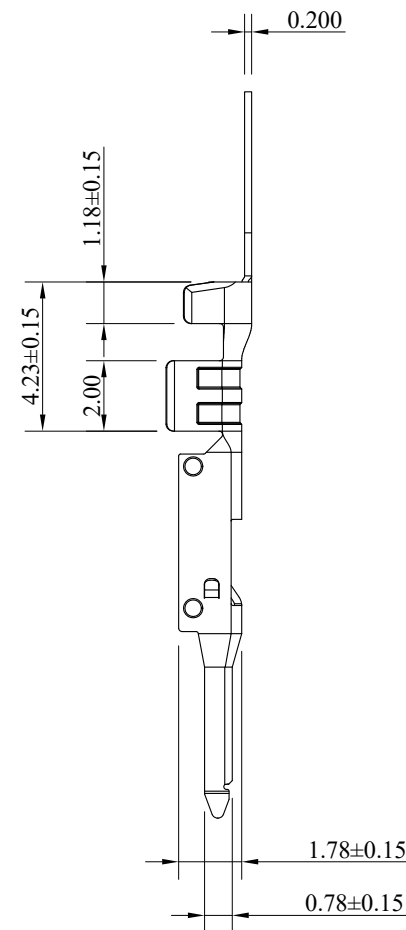

Specifications:

Current rating:6.5A AC/DC
Voltage rating:250V AV/DC
Temperature range:-40°C~105°C
Contact Resistance:10mΩ Max
Insulation Resistance:1000MΩ Min
Withstanding voltage:1500V AC/minute

Gener part number:

2526T** *M0*
1 2 3

1.Material:

PB=Phosphor Bronze
NA=C7025

2.Plating:

0=Tin Plated
F=Selective Gold Flash
J=15μ"min.Selective Gold

3.Wire range:

1=AWG20~22
2=AWG24~26

Part No	A	B	C	D
2526T***M01	2.33	1.97	1.94	2.14
2526T***M02	2.12	1.43	2.00	1.55

TOLERANCE UNLESS OTHERWISE SPECIFIED			 LEOCO CORPORATION http://www.leoco.com.tw					
mm	mm	inch	APPROVED BY: DATE:			TITLE: 2.5mm Pitch Plug Crimping Terminal		
1 PLACE	± 0.30	± ---	Chard 2026.01.16					
2 PLACES	± 0.20	± ---	CHECKED BY: DATE:					
			Angel 2026.01.14					
3 PLACES	± 0.10	± ---	DRAWN BY: DATE:			PART NO.: 2526T***M0*		
4 PLACES	± ---	± ---	Norah 2026.01.10					
ANGULAR ±1°			SIZE: A3	SCALE: 1:1		DRAWING NO.: 252628S	REV.: A	SHEET: 1 OF 1