

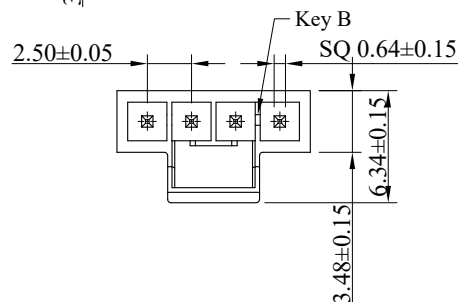



RoHS COMPLIANT

CUSTOMER DRAWING


REV.	ECO. NO.	DESCRIPTION	DATE
A	DWG REL	APPROVED	2025.12.18

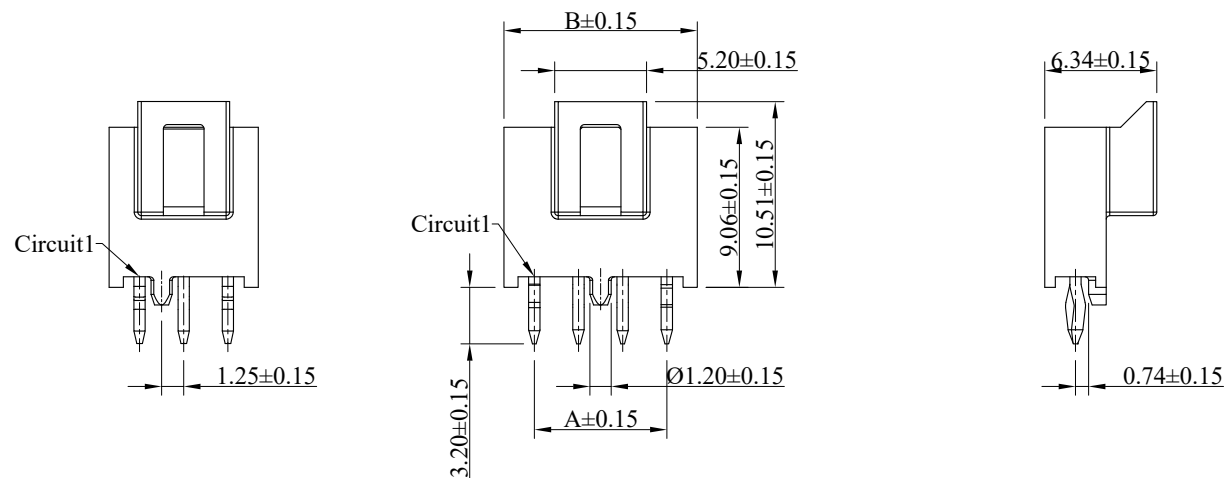


02P




03P




05P,07P



04P,06P,08P

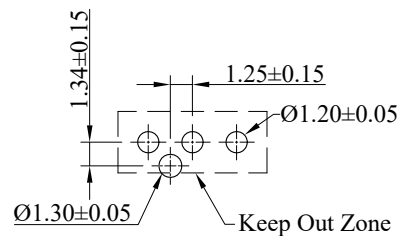

03P,05P,07P

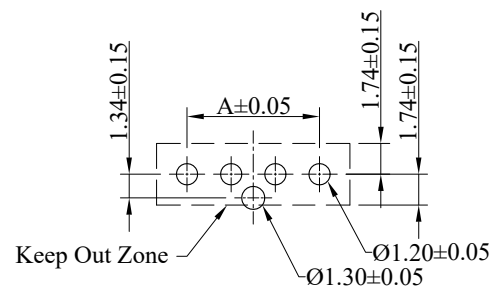

02P,04P,06P,08P

Recommended PCB Layout
Thickness=1.6~2.4mm

Material:

Insulator:High Temperature Plastic,UL94V-0,Natural
Contact:Brass

Specifications:

Current rating:6.5A AC/DC
Voltage rating:250V AC/DC
Contact resistance:10mΩ Max
Insulator resistance:1000MΩ Min
Withstanding Voltage:1500V AC/minute
Temperature range:-40°C~+105°C

Gener part number:

2526P**V*0B
1 2

1.No.of Circuits(02~08)

2.Plating:

0=Tin Plated

U=Gold Flash

J=15μ"min.Selective Gold

A=2.50×No.of spaces

B=A+3.45

TOLERANCE UNLESS
OTHERWISE SPECIFIED

mm	mm	inch
1 PLACE	± 0.30	± --
2 PLACES	± 0.20	± --
3 PLACES	± 0.10	± --
4 PLACES	± --	± --

ANGULAR ±1°



LEOCO CORPORATION

<http://www.leoco.com.tw>

APPROVED BY: Chard
DATE: 2026.01.16

CHECKED BY: Angel
DATE: 2026.01.09

DRAWN BY: Norah
DATE: 2025.12.18

TITLE:
2.5mm Pitch Single Row
Wafer Straight Type

PART NO.:
2526P**V*0B

SIZE:
A3

SCALE:
1:1



DRAWING NO.:
252630S

REV.:
A

SHEET:
1 OF 1