

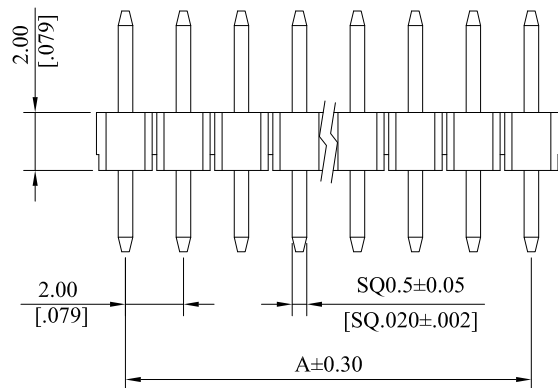


RoHS COMPLIANT

CUSTOMER DRAWING		
REV.	ECO. NO.	DESCRIPTION
A	DWG. REL.	APPROVED
B	ES960589	
C	ES130726	1.update plating 2.add circuits
D	ES170104	Material: PBT→PA6T

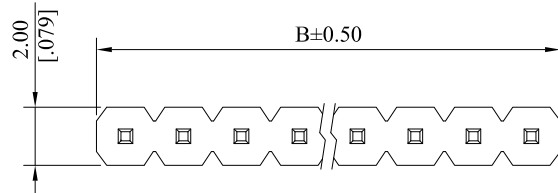

Material:
Insulator: PA6T, UL94V-0,Black
Contact: Brass

General Part Number:

2018P ** V * 00
1 2


1.No.of circuits(1~40)

2.Plating

T=Tin plated 120u"min.over 30u" min. Nickel underplating overall
M=Matte Tin plated 80u"min.over 30u" min. Nickel underplating overall
U=Gold flash over 30u" min. Nickel underplating overall
W=15u" min.Gold over 30u" min. Nickel underplating overall
Z=30u" min.Gold over 30u" min. Nickel underplating overall

A=2.0mm *No.of spaces

B=A+2.0mm

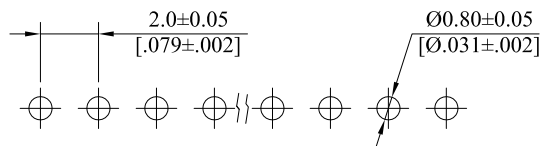

P.C.B LAYOUT

TOLERANCE UNLESS OTHERWISE SPECIFIED			LEOCO CORPORATION http://www.leoco.com.tw		
mm [inch]	mm	inch	APPROVED BY: Chard	DATE: 2017.01.05	TITLE: 2.54 Pitch Pin Header
1 PLACE	± 0.30	± --	CHECKED BY: Angel	DATE: 2017.01.05	PART NO.: 2018P**V*00
2 PLACES	± 0.20	± .012	DRAWN BY: Spring	DATE: 2017.01.05	
3 PLACES	± 0.10	± .008	SIZE: A3	SCALE: 1:1	
4 PLACES	± --	± .004	ANGULAR ±1°	SCALE: 1:1	DRAWING NO.: 201803S
			REV.: D		
			SHEET: 1 OF 1		