

*** 3986 V Series ***

Material :

* Insulator : Nylon 6/6, UL 94V-0

* Contact : Brass





* Plating : Tin plated 120μ " min over 30μ " min. nickel overall

RoHS COMPLIANT


3986 P ** H 000
1 2

1. No.of circuits

2. H: Right Angle (square pin) Type

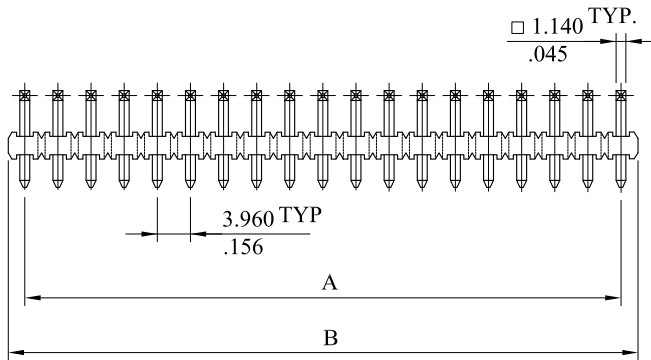

Circuits	Part No.	Dimension	
	Square Pin	A	B
2	3986P02H000	3.960(.156)	7.9(.311)
3	3986P03H000	7.920(.312)	11.9(.469)
4	3986P04H000	11.880(.468)	15.8(.622)
5	3986P05H000	15.840(.624)	19.8(.780)
6	3986P06H000	19.80(.780)	23.8(.937)
7	3986P07H000	23.76(.936)	27.7(1.091)
8	3986P08H000	27.72(1.092)	31.7(1.248)
9	3986P09H000	31.68(1.248)	35.6(1.402)
10	3986P10H000	35.64(1.403)	39.6(1.559)
11	3986P11H000	39.60(1.560)	43.6(1.717)
12	3986P12H000	43.56(1.716)	47.5(1.870)
13	3986P13H000	47.52(1.871)	51.5(2.028)
14	3986P14H000	51.48(2.027)	55.4(2.181)
15	3986P15H000	55.44(2.183)	59.4(2.339)
16	3986P16H000	59.40(2.339)	63.4(2.496)
17	3986P17H000	63.36(2.494)±0.30	67.3(2.650)
18	3986P18H000	67.32(2.650)±0.30	71.3(2.807)
19	3986P19H000	71.28(2.806)±0.30	75.2(2.961)
20	3986P20H000	75.24(2.962)±0.30	79.2(3.118)

				 LEOCO CORPORATION			APPROVED:		PART NO.: 3986P**H000				
				GENERAL TOLERANCES: (UNLESS SPECIFIED)			DATE:						
							CHECKED:		TITLE: HEADER				
					mm	inch	DATE:		DRAWING NO.: 398630S				
B	ES101224			1 PLACE	± 0.30	± --	DRAWN:						
				2 PLACES	± 0.20	± .012	DATE:						
A	DWG REL			3 PLACES	± 0.10	± .008			UNITS	SCALE	SIZE	SHEET	REV.
REV.	ECO. NO.	CHG.	APP.	4 PLACES	± --	± .004			$\frac{\text{mm}}{\text{inch}}$	1:1	A4	1/1	B
				ANGULAR ± (1°)									